



5-Step transformer TEM

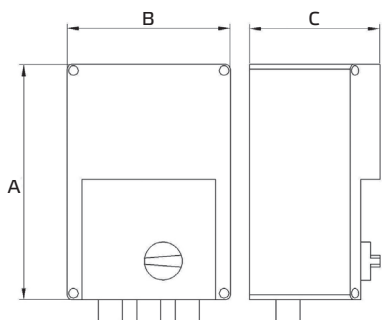

TEM 035, TEM 050, TEM 075
Plastic housing

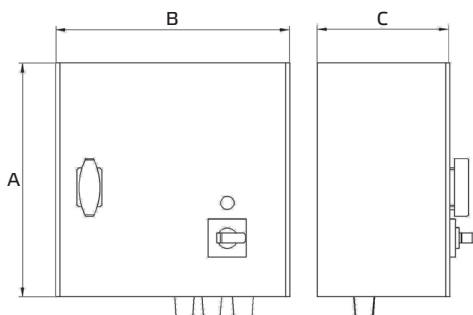

TEM 100, TEM 130
Metal housing




| Type | ID | I _{max.} A | Fuse A | A mm | B mm | C mm | D mm | E mm | Weight kg |
|---------|--------|------------------------|-----------|---------|---------|---------|---------|---------|--------------|
| TEM 035 | 103502 | 3,5 | 5,0 | 255 | 170 | 140 | 155 | 194 | 4,6 |
| TEM 050 | 103519 | 5,0 | 8,0 | 255 | 170 | 140 | 155 | 194 | 5,3 |
| TEM 075 | 103507 | 7,5 | 12,5 | 305 | 200 | 140 | 183 | 236 | 7,8 |
| TEM 100 | 103511 | 10,0 | 16,0 | 325 | 300 | 185 | 255 | 255 | 12,6 |
| TEM 130 | 103950 | 13,0 | 18,0 | 325 | 300 | 185 | 255 | 255 | 15,1 |


- 5-Step transformer TEM
- 230 V ~, 50/60 Hz
- With motor protection
- Surface mounting
- Max. ambient temp 35 °C
- Protection Class IP 54

| Type | Output voltage U _A V | | | | |
|---------|------------------------------------|-----|-----|-----|-----|
| | 1 | 2 | 3 | 4 | 5 |
| TEM 035 | 110 | 140 | 170 | 200 | 230 |
| TEM 050 | 110 | 140 | 170 | 200 | 230 |
| TEM 075 | 110 | 140 | 170 | 200 | 230 |
| TEM 100 | 110 | 140 | 170 | 200 | 230 |
| TEM 130 | 110 | 140 | 170 | 200 | 230 |

Wiring diagram :

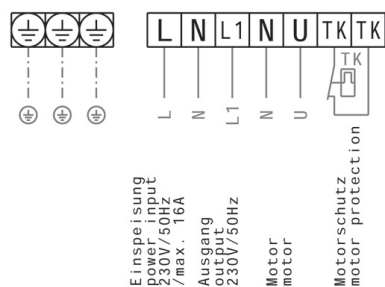

Mounting :



Legend
 U_A = Output voltage
 I_{max.} = Max. Operating Current