


Premium Baffle Filter

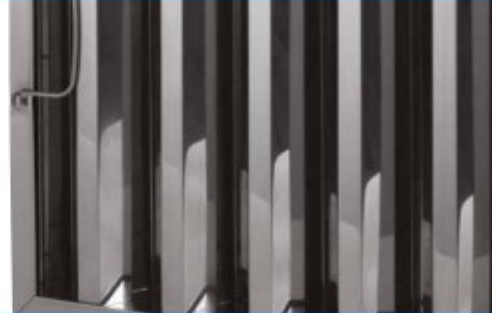

LONGAR® TYPE 2 FEATURES:

- 100% Flame barrier protection to DIN 18869-5.
- Cutsafe safety edges.
- Fully welded construction – all stainless steel construction.
- Meets insurance requirements.
- Meets HVCA DW172 requirements.
- Folding handles and drainholes as standard.
- Robust baffle filter construction – built to last.
- Tested & certified to European standard DIN 18869-5.
- Tested & certified to American standard UL1046.
- Tested & certified to ASTM2519.

APPLICATIONS

- Commercial kitchens
- Water mist separation
- Spark arrestors
- Sand filtration
- Grease filtration

LONGAR® TYPE 2 PREMIUM BAFFLE FILTER

For use in commercial kitchens and ventilation to extract grease laden air and act as a fire barrier. Fire barriers prevent any cooking flames traveling past the extract canopy. The new Type 2 is a development of customers requesting certain attributes for the baffle filter, the main ones being safety edges on frame and blades. LONGAR® Type 2 is available in standard depths of 20mm and 45mm depths, this is required for the filter to operate at a constant efficiency and to protect the system as a flame barrier as tested to European Standard DIN 18869-5 and American Standard UL1046. Custom sizes are available on request.

CONSTRUCTION / MATERIAL SPECIFICATIONS

As standard all baffles are manufactured with Stainless Steel 430 polished finish. (Other finishes and materials are available). Maximum Operating temperature 400C or 750F.

FITTING INSTRUCTIONS

- Fit products, handles in direction of air in.
- Product vertical in air stream.

HANDLING

- Handle with care when unpacking.
- Store in dry and frost protected place.

MAINTENANCE

- All maintenance should be carried out in accordance with the planned maintenance set by installation contractor.
- When handling any components suitable PPE should be used - gloves, eye protection and access equipment.
- Filters should be cleaned by a trained operative either daily for heavy use or weekly for light use.
- For more exact guide to cleaning you should contact a cleaning specialist.

PACKAGING

- All units are packaged in double wall boxes with separators for standard sizes, glued closed for protection whilst in transit against contamination.

FILTER CLASSIFICATION:

- Filter Class G2
- UL Class 2

TESTED TO:

- DIN 18869-5
- UL 1046
- ASTM 2519

MANUFACTURED TO:

- DW172
- ISO9001