

Rectangular centrifugal fans

Selection chart

Helios

This chart enables the easy selection of rectangular fans by combining the parameters of static pressure increase Δp_{st} , case breakout and intake

air sound levels as sound pressure levels at 4 m (free field conditions).

	Sound press. breakout	Sound press. intake	Air flow volumes V m³/h against static pressure												
Type	L _{PA} dB(A)	L _{PA} dB(A)	(ΔP _{st}) in Pa												
	in 4 m	in 4 m	0	50	100	150	200	250	300	350	400	500	600	700	800
KV – with forward curved impellers															
KVW 200/4/40/20	37	49	920	890	850	800	750	40							
KVD 200/4/40/20	36	50	1130	1030	930	830	710								
KVD 225/4/50/25	43	52	1920	1820	1710	1590	1460	1290	1040						
KVD 250/4/50/30	42	56				2110	1970	1810	1610	1320					
KVD 280/4/60/30	45	59	3930	3780	3620	3470	3310	3150	2990	2820	2620	2000			
KVD 315/4/60/35	48	61						4400	4230	4060	3870	3430	2700		
KVD 355/4/70/40	54	67							5580	5440	5300	4960	4540	3920	
KVD 355/6/70/40	42	53			4970	4680	4380	4060	3680	3190					
KVD 355/8/70/40	35	47	4790	4410	4000	3520	2850								
KVD 400/6/80/50	45	60	7620	7320	7020	6710	6390	6060	5690	5290	4800	1460			
KVD 400/8/80/50	38	51			5140	4670	4150	3420							
KVD 450/6/100/50	50	60							8170	7850	7500	6630	5220		
KVD 450/8/100/50	46	56			7290	6880	6420	5860	5120	3980					
KR EC – with backward curved impellers / SKR EC – with sound isolated casing															
KRW EC 180/30/15	44	58	660	620	590	550	520	480	440	410	360	240	70		
KRW EC 225/40/20	46	60	1430	1280	1130	1010	920	830	750	660	590	440	290	120	
KRW EC 315/50/25	44	56	1410	1320	1190	1060	970	870	780	700	630	480	340	190	
KRW EC 355/60/30	46	58	3110	3000	2870	2730	2590	2430	2260	2020	1750				
KRW EC 400/60/35	56	66	4460	4360	4250	4140	4020	3890	3760	3630	3500	3230	2890	2500	1950
KRW EC 450/70/40	46	59	5450	5210	4970	4740	4480	4210	3960	3670	3380	2580	1570		
KRD EC 450/70/40	54	67	7480	7310	7080	6860	6650	6450	6200	5970	5750	5300	4820		
KRD EC 500/80/50 A	51	62	8810	8520	8230	7940	7630	7260	6890	6560	6120	5300	4170	2590	
KRD EC 500/80/50 B	60	69	10400	10210	10010	9810	9600	9390	9180	8970	8760	8260	7720	7170	6570
KRD EC 560/100/50 A	54	62	11270	10840	10410	10000	9630	9270	8890	8480	8010	6990	5340	1190	
KRD EC 560/100/50 B	60	69	14410	14120	13830	13530	13230	12950	12670	12410	12130	11550	10970	10360	9620
SKRW EC 315/50/25	47	54	2600	2500	2400	2270	2140	2020	1860	1720	1500	1040			
SKRW EC 355/60/30	51	58	3950	3840	3720	3590	3480	3370	3250	3120	3000	2750	2460	2070	580
SKRW EC 400/60/35	51	56	4200	4100	4000	3890	3760	3620	3480	3330	3170	2880	2560	1990	
SKRW EC 450/70/40	45	54	5420	5130	4900	4620	4330	4050	3770	3420	3060	2280	1010		
SKRD EC 355/60/30	52	60	4550	4450	4360	4230	4125	4030	3920	3830	3710	3500	3280	3030	2695
SKRD EC 400/60/35	51	58	5000	4880	4760	4630	4510	4380	4250	4160	3940	3630	3340	3060	2750
SKRD EC 450/70/40 A	51	59	7500	7290	7120	6820	6590	6360	6110	5930	5620	5200	4710	4200	3320
SKRD EC 500/80/50 A	48	56	8600	8250	7910	7540	7190	6830	6450	6070	5660	4770	3270		
SKRD EC 500/80/50 B	55	61	10650	10400	10160	9920	9710	9440	9210	8980	8720	8240	7670	7000	6280
SKRD EC 560/100/50 A	48	56	10070	9740	9410	9080	8720	8310	7870	7420	6890	5700	3990		
SKRD EC 560/100/50 B	56	60	13700	13450	13190	12920	12650	12370	12090	11810	11540	10980	10410	9750	8990
KR – with backward curved impellers / SKR – with sound isolated casing															
KRW 180/2/30/15	37	51	540	480	420	360	280	210	110						
KRW 225/2/40/20	40	52	1020	920	820	700	590	490	380	260	100				
KRW 225/2/50/25	45	52	1160	1100	1040	990	910	850	780	690	610	340	60		
KRW 315/4/50/25	39	51	1760	1580	1390	1110	840	370							
KRW 355/4/60/35	42	55	3600	3370	3130	2900	2590	2090	1330	570					
KRW 400/4/70/40	44	54	4970	4710	4400	4110	3730	3320	2750	2090	1160				
KRW 450/4/70/40	51	59	6650	6360	6010	5710	5430	5120	4730	4280	3850	2290			
KRW 500/4/80/50	52	62	9700	9380	9040	8670	8310	7920	7460	6890	6260	4590	2290		
KRD 355/4/60/35	37	50	2840	2640	2410	2110	1860	1510	1050	450					
KRD 450/4/70/40	47	57	5830	5570	5320	5060	4810	4550	4230	3930	3610	2840	1840		
KRD 500/4/80/50 A	52	58	8430	8120	7810	7490	7110	6670	6300	5870	5420	4530	3560	1330	
KRD 560/6/80/50	41	53	7460	6940	6300	5630	5110	4290	3490	2410	400				
KRD 560/4/80/50	55	66	11970	11630	11260	10870	10480	10080	9640	9140	8620	7230	5470	2920	840
KRD 630/6/100/50	44	55	8740	8280	7700	7140	6440	5750	5060	4310	3370	920			
KRD 630/4/100/50	55	66	12100	11800	11510	11230	10940	10640	10320	9980	9620	8810	7760	6210	4620
SKRW 315/4/50/25	34	43	1770	1620	1400	1170	650								
SKRW 355/4/60/35	39	49	3580	3350	3070	2830	2450	1880	110						
SKRW 400/4/70/40	42	49	4940	4540	4230	3830	3470	3040	2460	1670	780				
SKRW 500/4/80/50	48	52	9540	9130	8640	8130	7630	7130	6640	6020	5520	4020			
SKRD 355/4/60/35	34	43	2800	2510	2270	2030	1670	1300	650	140					
SKRD 450/4/70/40	46	52	5430	5230	5000	4770	4520	4240	4000	3640	3290	2380	860		
SKRD 500/6/70/40	36	48	4620	4230	3800	3480	2980	2490	1490						
SKRD 500/4/80/50	48	54	8050	7830	7520	7060	6650	6210	5820	5450	5040	4150	2560	690	
SKRD 560/6/80/50	36	46	7600	6990	6220	5630	5040	4280	3220	1810	400				
SKRD 630/6/100/50	43	52	8450	8010	7450	6900	6230	5490	4750	3780	2670				

For complete information see the "general technical information" and descriptions on the product pages.

Position, installation and drainage holes

Models can be installed in any position, however types KR must be installed with the inspection flap facing downwards or to the side. The swing-out areas need to be cleared and accessed easily for service and maintenance. If condensation occurs (e.g. intermittent operation, high humidity or varying temperatures) the fan must be installed in a way that the condensation can drain off unhindered. Additional holes may have to be drilled into the casing at the appropriate positions. Alternatively, the duct system may have to be insulated to avoid condensation.

Noise/vibration transmission

To be prevented from ducting and building. Therefore, the fan should be secured with sound insulation and connected flexibly to the ducting. For this, see VS accessories.

Explosion proof models

With regards to operating conditions and norms please refer to chapter "Information for planning – explosion proof". The ex-protected types correspond to unit group II, category 2G for operation in zone 1 and 2 pursuant to Directive 2014/34/EU (ATEX). The motors of the KVD Ex range are equipped with positive temperature coefficient (PTC) thermistors (to monitor the temperature of windings) as standard. They are prewired to the terminal board and must be connected to the motor protection tripping unit MSA. This makes the KVD Ex fans suitable for speed control that can be carried out via TSD or TSSD transformer controllers. The minimum voltage should not drop below 100 V. Electronic speed control or regulation by means of a frequency inverter are not permitted.

Motor - Impeller

All AC types incorporate a motor with external rotor motor protected to IP 44 or IP 54 within the air flow. They conform to DIN EN 60034/VDE 0530 and DIN EN 60335-1/VDE 0700-1 with an insulation class F, plus moisture protection. The EC types are equipped with energy-saving, speed-controllable EC external rotor motors protected to IP 44 or IP 54 for the lowest operating costs.

All motors are maintenance free, interference-free, speed controllable and suitable for continuous operation.

The ball bearings are greased for life.

The centrifugal impellers are pressed onto the rotating part of the motor body and dynamically balanced to DIN ISO 1940 T.1 – class 6.3 as one unit.

Speed control

All InlineVent® AC rectangular fans are speed controllable via voltage reduction of 0 – 100 %. Thereby the operating level can be adapted to the required air flow volume. Our speed controllers are suitable to control various fans (one or more) up to their maximum nominal output. When selecting a controller not shown on the chart, allow for a 10 % safety margin.

It is possible to control 3 ph.-fans through frequency inverter by on-site installation of sine filters between inverter and motor. All EC types are steplessly controllable via speed-potentiometer. Regulation is also possible via three-step switch or steplessly via universal control system or electronic differential pressure/temperature controller. For example, the performance levels are shown on the characteristic curve.

Air flow direction

The air flow direction of centrifugal fans is fixed and cannot be reversed; but it can be specified in all units through the installation method. The rotational direction and the direction of air flow are marked with arrows on the units and must be checked when installing.

Incorrect direction of rotation

If the fan is operated in the incorrect direction of rotation the AC motor will be overloaded and the thermal contacts will trip. Typical indication of this is a virtually low fan efficiency combined with high noise levels and vibration.

Air flow temperature

All models are applicable in the range of –40 °C to at least +60 °C, types KV Ex from –20 °C to +40 °C. The upper temp. threshold value varies between the models and can be found at the related charts on the individual product page.

The models and their specifications

KV

Centrifugal rectangular fans with forward curved impeller paddles and swing-out motor impeller unit. Low-noise centrifugal impellers in volute casing for high pressure levels.

$\dot{V} = 920 - 8500 \text{ m}^3/\text{h}$.

Compact and flat design for versatile usage in exhaust and fresh air systems in commercial and industrial applications.



KR and KR EC

Rectangular fans with backward curved impeller paddles, with optional energy-saving EC motor technology. High performance centrifugal impellers with high efficiency. Swing-out motor impeller unit.

$\dot{V} = 540 - 14\,410 \text{ m}^3/\text{h}$.

For conveying higher volume flow rates in extract and fresh air systems. Uncritical in extraction of polluted air.




SKR and SKR EC

High performance centrifugal impellers (backward curved) in sound insulated casing with good damping characteristics for noise-critical applications, with optional energy-saving EC motor technology. Performance figures similar to KR.

$\dot{V} = 1770 - 13\,700 \text{ m}^3/\text{h}$.

For further reduction of intake and exhaust air noise levels, rectangular attenuators (KLF, accessory) are recommended. Exhaust and fresh air fans for applications with specific noise level requirements.



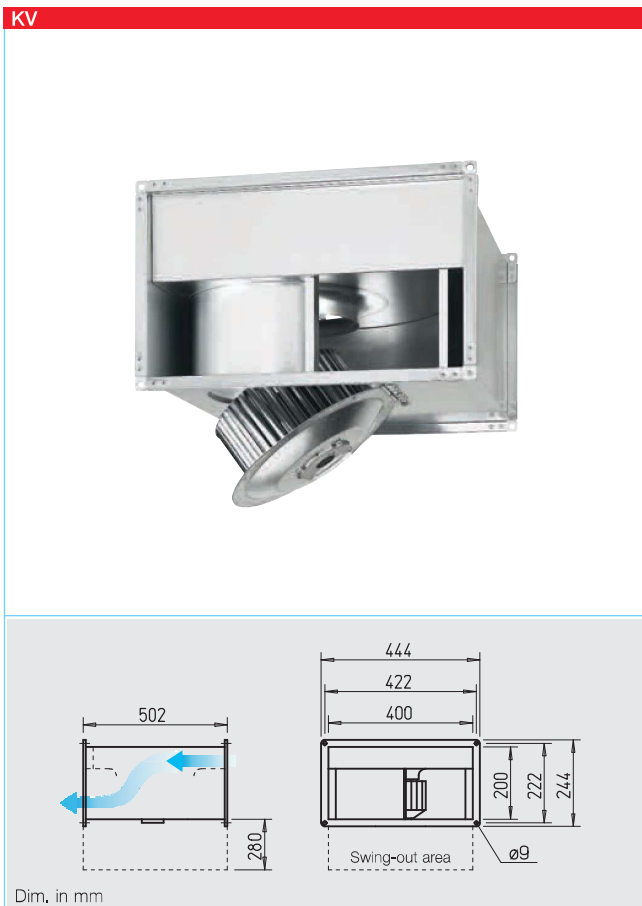

Rectangular centrifugal fan with forward curved impeller blades and swing-out motor impeller unit.

- Low-noise centrifugal impellers in aerodynamic galvanised steel casing for high pressure levels.
- Compact and flat design for use in extract and fresh air systems in commercial and industrial applications.

■ Specification

□ Casing

Made of galvanised steel and flanged on both ends. Space saving, compact design.

- Easy to clean and service thanks to the swing-out motor impeller unit.

□ Impeller

Forward curved centrifugal impeller made of galvanised steel, highly efficient with low noise levels. Aerodynamically optimised casing; intake air flow by means of an inlet nozzle.

□ Motor

Totally enclosed, maintenance-free external rotor motor with directly fitted impeller, protected to IP 44. Windings with protection against moisture. Ball bearing mounted and interference-free. Dynamically balanced with

resilient motor mounting bracket for low vibration and low noise operation.

□ Electrical connection

Terminal box (IP 55 for 3 ph.- or IP 44 for 1 ph.-types) is mounted with a permanently attached cable.

□ Motor protection

Model KVV through thermal contacts which are connected in series with winding and automatically resets. Model KVD through built-in thermal contacts which must be connected to a motor full protection device.

□ Speed control

By voltage reduction using a 5 speed transformer controller (recommended) or an electronic controller (stepless). The performance figures at corresponding voltages are given in the performance curve.

□ Sound Levels

Above the performance curve, total values and spectrum are given for:

- Sound level case breakout
- Sound level intake
- Sound level exhaust

The sound power level (on intake) is additionally shown within the performance curve for corresponding control voltages. In the table below you can also find:

- Case breakout sound level at 4 m (free field conditions).

□ Installation


Possible in any position. Attention should be paid to accessibility/swing out.

Note	Page
Selection chart	372
Technical description	373
Design guidelines	10 on
Modul. system components	370

Type	Ref. no.	Air flow volume, free discharge	Nominal R.P.M.	Sound press. case breakout	Power consumption		Wiring diagram	Max. air flow temperature at		Weight net approx.	Speed controller 5-step				Motor full protection device to connect built-in thermal contacts	
		m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	Nom. vol. °C	Control °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
1-phase motor, 230 V, 50 Hz, capacitor motor, protection to IP 44																
KVW 200/4/40/20	5675	925	810	37	0,21	0,95	508	60	50	11	TSW 1,5	1495	—	—	—	—
3-phase motor, 230/400 V, 50 Hz, protected to IP 44																
KVD 200/4/40/20	5676	1130	1260	36	0,25	0,82/0,47	860	70	70	8,6	TSD 0,8	1500	RDS 1	1314	MD	5849


KVW 200/4/40/20

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
LWA Case breakout		57	46	52	50	52	45	40	32
LWA Intake		69	64	64	61	55	56	54	47
LWA Exhaust		72	63	65	65	64	63	62	55

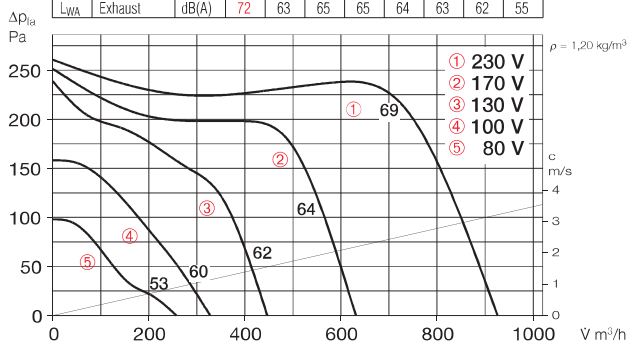

KVD 200/4/40/20

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
LWA Case breakout		56	45	52	51	48	45	43	37
LWA Intake		70	65	65	62	58	58	59	54
LWA Exhaust		77	68	70	68	68	70	68	64

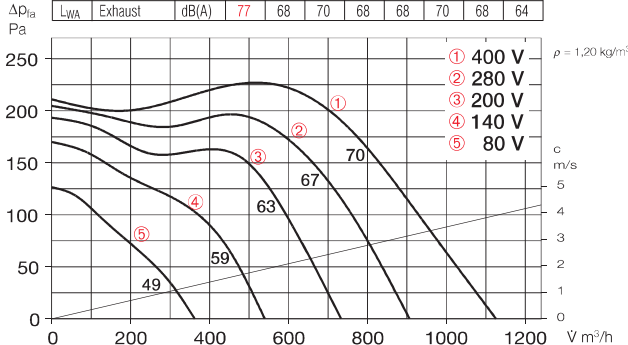

Accessory details Page

Shutters, grilles and louvres	420, 487 on
Filters, heaters and attenuators	421 on
Temperature control systems for heaters	427, 432 on
Speed controllers and motor full protection devices	525 on

Accessories

Gravity shutter

Type VK 40/20 Ref. no. 0874

External airflow operated gravity shutter made of polymer, light grey.

External louvres

Type WSG 40/20 Ref. no. 0109

Robust construction made of aluminium extrusion profile, natural colour anodised.

Volume control damper for ducting

Type JVK 40/20 Ref. no. 6910

Casing made with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 40/20 Ref. no. 0832

For cost effective adaption of rectangular fans into circular ducting systems with Ø 200 mm.

Flexible connectors

Type VS 40/20 Ref. no. 5694

Flexible in-duct connector with flanges on both sides.

Counterflange

Type GF 40/20 Ref. no. 6919

Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 40/20 Ref. no. 8728

For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 40/20 G4 No. 8720

Type KLF 40/20 F7 No. 8644

Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Electric heater battery

Type EHR-K 6/40/20 No. 8702

Type EHR-K 15/40/20 No. 8703

Heating elements enclosed in a galvanised steel casing with connecting flanges on both sides.

Temperature control system for electric heater battery

Type EHSD 16 Ref. no. 5003

Warm water heater battery



Type WHR 2/40/20 No. 8782


Type WHR 4/40/20 No. 8783

For in-duct installation.

Temperature control system for warm water heater battery

Type WHS HE Ref. no. 8319



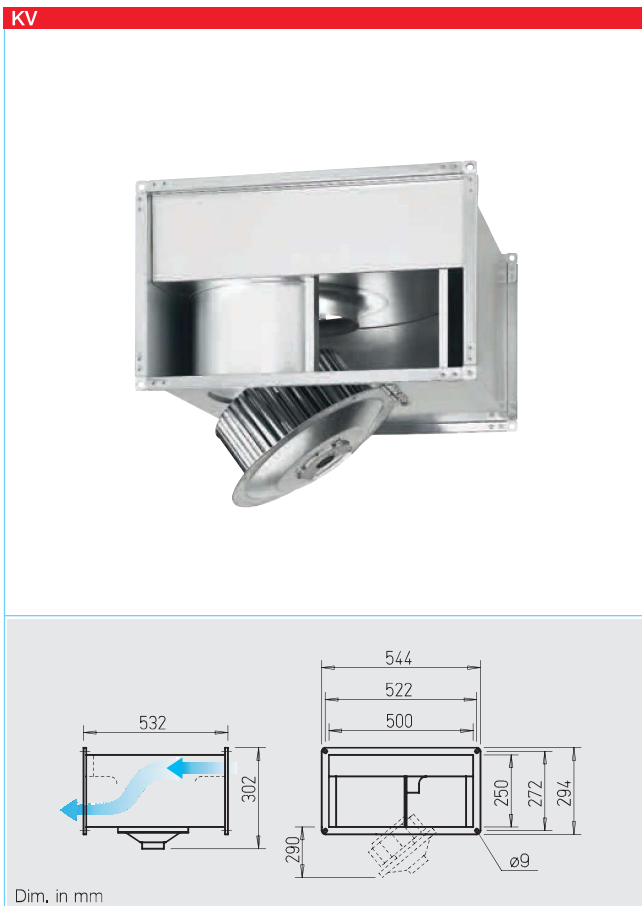

Rectangular centrifugal fan with forward curved impeller blades and swing-out motor impeller unit.

- Low-noise centrifugal impellers in aerodynamic galvanised steel casing for high pressure levels.
- Compact and flat design for use in extract and fresh air systems in commercial and industrial applications.

■ Specification

□ Casing

Made of galvanised steel and flanged on both ends. Space saving, compact design.

- Easy to clean and service thanks to the swing-out motor impeller unit.

□ Impeller

Forward curved centrifugal impeller made of galvanised steel, highly efficient with low noise levels. Aerodynamically optimised casing; intake air flow by means of an inlet nozzle.

□ Motor

Totally enclosed, maintenance-free external rotor motor with directly fitted impeller, protected to IP 44. Windings with protection against moisture. Ball bearing mounted and interference-free.

Dynamically balanced with resilient motor mounting bracket for low vibration and low noise operation.

□ Electrical connection

Terminal box (IP 55 for 3 ph., IP 65 for explosion-proof types) is mounted with permanently attached cable.

□ Motor protection

Through built-in thermal contacts which must be connected to a motor full protection device.

□ Speed control

By voltage reduction using a 5 speed transformer controller (recommended) or an electronic controller (stepless). The performance figures at corresponding voltages are given in the performance curve.

□ Sound Levels

Above the performance curve, total values and spectrum are given for:

- Sound level case breakout
 - Sound level intake
 - Sound level exhaust
- The sound power level (on intake) is additionally shown within the performance curve for corresponding control voltages. In the table below you can also find:
- Case breakout sound level at 4 m (free field conditions).

□ Installation


Possible in any position. Attention should be paid to accessibility/swing out.

Note	Page
Selection chart	372
Technical description	373
Design guidelines	10 on
Modul. system components	370

Type	Ref. no.	Air flow volume, free discharge	Nominal R.P.M.	Sound press. case breakout	Power consumption		Wiring diagram	Max. air flow temperature at		Weight net approx.	Speed controller 5-step		Motor full protection device to connect	
		\dot{V} m ³ /h	min ⁻¹	dB(A) in 4 m	kW	A	No.	Nom. vol.	Control	kg	motor protect. unit	Ref. no.	motor protect. unit	Ref. no.
								+°C	+°C		Type		Type	
3 ph. motor, 230/400 V, 50 Hz, protection to IP 44														
KVD 225/4/50/25	5679	1950	1270	43	0.54	1.6/0.93	860	65	60	17	TSD 1,5	1501	RDS 2	1315
Explosion-proof Ex e II, temperature class T1 – T3, 3-phase 400 V, 50 Hz, protection to IP 44														
KVD 225/4/50/25 Ex	6810	1900	1280	43	0.53	0.92	899	40	40	17	TSD 1,5	1501	—	—
													MSA	1289


KVD 225/4/50/25

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
LWA Case breakout		63	47	56	56	57	55	51	44
LWA Intake	dB(A)	72	64	66	62	63	65	64	58
LWA Exhaust	dB(A)	78	63	66	69	73	72	71	65

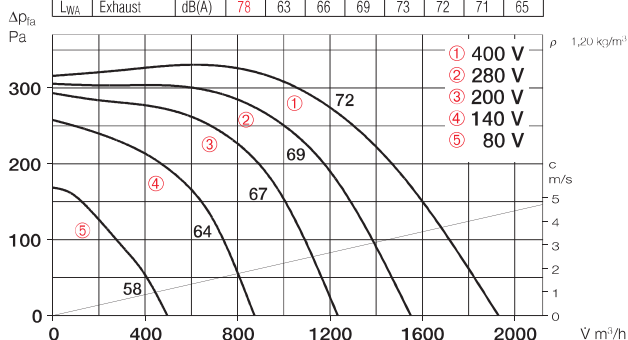

KVD 225/4/50/25 Ex

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
LWA Case breakout		63	43	56	57	58	54	49	43
LWA Intake	dB(A)	73	65	66	62	63	65	65	60
LWA Exhaust	dB(A)	79	63	67	70	73	72	72	67

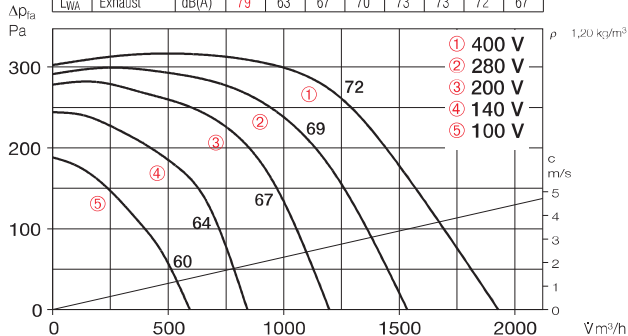

Accessory details Page

Shutters, grilles and louvres	420, 487 on
Filters, heaters and attenuators	421 on
Temperature control systems for heaters	427, 432 on
Speed controllers and motor full protection devices	525 on

Accessories

Gravity shutter

Type VK 50/25 Ref. no. 0875

External airflow operated gravity shutter made of polymer, light grey.

External louvres

Type WSG 50/25 Ref. no. 0110

Robust construction made of aluminium extrusion profile, natural colour anodised.

Volume control damper for ducting

Type JVK 50/25 Ref. no. 6911

Casing made with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 50/25 Ref. no. 0833

For cost effective adaption of rectangular fans into circular ducting systems with Ø 250 mm.

Flexible connectors

Type VS 50/25 Ref. no. 5695

Flexible in-duct connector with flanges on both sides.

– for Ex-fans

Type VS 50/25 Ex Ref. no. 0265

Counterflange

Type GF 50/25 Ref. no. 6920

Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 50/25-30 No. 8729

For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 50/25-30 G4 No. 8721

Type KLF 50/25-30 F7 No. 8645

Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Electric heater battery

Type EHR-K 8/50/25-30 No. 8704

Type EHR-K 24/50/25-30 No. 8705

Heating elements enclosed in a galvanised steel casing with connecting flanges on both sides.

Temperature control system for electric heater battery

Type EHSD 16 Ref. no. 5003

Warm water heater battery


Type WHR 2/50/25-30 No. 8784


Type WHR 4/50/25-30 No. 8785

For in-duct installation.

Temperature control system for warm water heater battery

Type WHS HE Ref. no. 8319



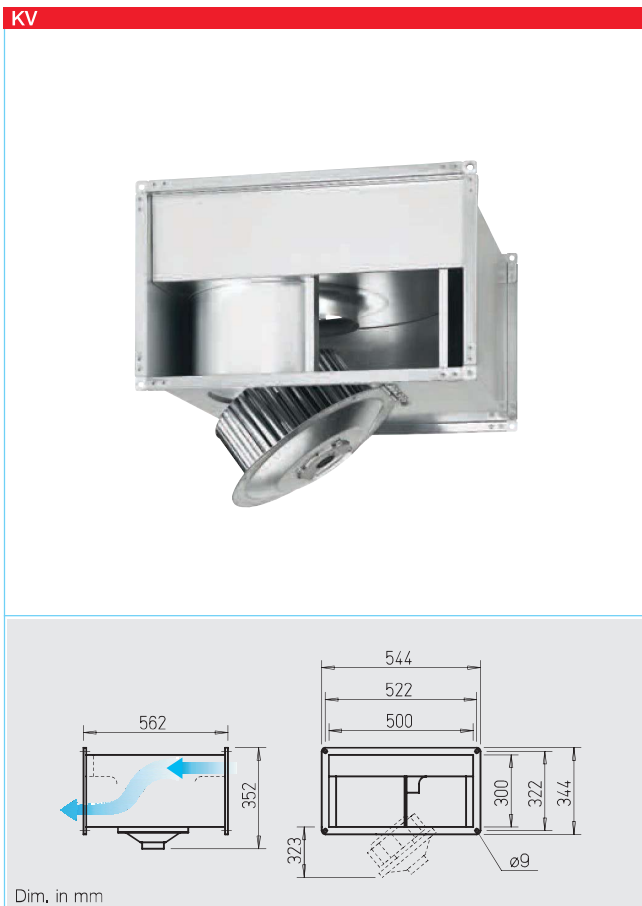

Rectangular centrifugal fan with forward curved impeller blades and swing-out motor impeller unit.

- Low-noise centrifugal impellers in aerodynamic galvanised steel casing for high pressure levels.
- Compact and flat design for use in extract and fresh air systems in commercial and industrial applications.

■ Specification

□ Casing

Made of galvanised steel and flanged on both ends. Space saving, compact design.

- Easy to clean and service thanks to the swing-out motor impeller unit.

□ Impeller

Forward curved centrifugal impeller made of galvanised steel, highly efficient with low noise levels. Aerodynamically optimised casing; intake air flow by means of an inlet nozzle.

□ Motor

Totally enclosed, maintenance-free external rotor motor with directly fitted impeller, protected to IP 44. Windings with protection against moisture. Ball bearing mounted and interference-free.

Dynamically balanced with resilient motor mounting bracket for low vibration and low noise operation.

□ Electrical connection

Terminal box (IP 55 for 3 ph., IP 65 for explosion-proof types) is mounted with permanently attached cable.

□ Motor protection

Through built-in thermal contacts which must be connected to a motor full protection device.

□ Speed control

By voltage reduction using a 5 speed transformer controller (recommended) or an electronic controller (stepless). The performance figures at corresponding voltages are given in the performance curve.

□ Sound Levels

Above the performance curve, total values and spectrum are given for:

- Sound level case breakout
 - Sound level intake
 - Sound level exhaust
- The sound power level (on intake) is additionally shown within the performance curve for corresponding control voltages. In the table below you can also find:
- Case breakout sound level at 4 m (free field conditions).


□ Installation

Possible in any position. Attention should be paid to accessibility/swing out.


Note	Page
Selection chart	372
Technical description	373
Design guidelines	10 on
Modul. system components	370

Type	Ref. no.	Air flow volume, free discharge	Nominal R.P.M.	Sound press. case breakout	Power consumption		Wiring diagram	Max. air flow temperature at		Weight net approx.	Speed controller 5-step		Motor full protection device to connect built-in thermal contacts			
								Nom. vol.	Control		without motor protect. unit	with motor protect. unit				
		Ų m³/h	min-1	dB(A) in 4 m	kW	A	No.	+°C	+°C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
3-phase motor, 230/400 V, 50 Hz, protected to IP 44																
KVD 250/4/50/30	5682	2200	1260	42	0.72	2.5/1.5	860	60	60	21	TSD 1,5	1501	RDS 2	1315	MD	5849
Explosion-proof Ex e II, temperature class T1 – T3, 3-phase 400 V, 50 Hz, protection to IP 44																
KVD 250/4/50/30 Ex	6811	2300	1240	42	0.74	1.5	899	40	40	21	TSD 1.5	1501	—	—	MSA	1289

KVD 250/4/50/30

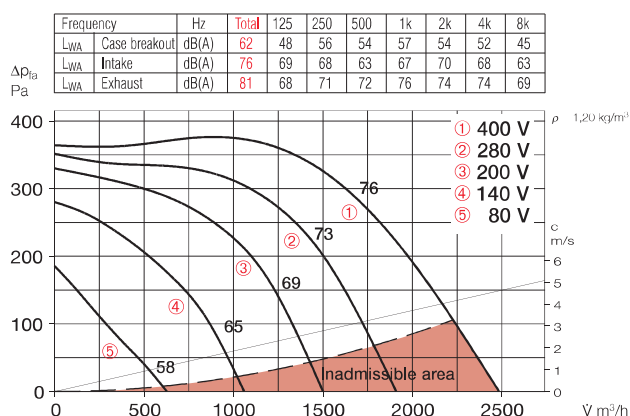

KVD 250/4/50/30 Ex

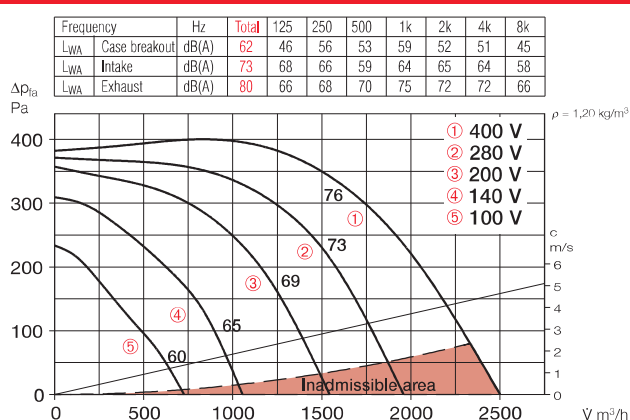

Accessory details Page

Shutters, grilles and louvres	420, 487 on
Filters, heaters and attenuators	421 on
Temperature control systems for heaters	427, 432 on
Speed controllers and motor full protection devices	525 on

Accessories

Gravity shutter

Type VK 50/30 Ref. no. 0876

External airflow operated gravity shutter made of polymer, light grey.

External louvres

Type WSG 50/30 Ref. no. 0111

Robust construction made of aluminium extrusion profile, natural colour anodised.

Volume control damper for ducting

Type JVK 50/30 Ref. no. 6912

Casing made with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 50/30 Ref. no. 0837

For cost effective adaption of rectangular fans into circular ducting systems with Ø 315 mm.

Flexible connectors

Type VS 50/30 Ref. no. 5696

Flexible in-duct connector with flanges on both sides.

– for Ex-fans

Type VS 50/30 Ex Ref. no. 0266

Counterflange

Type GF 50/30 Ref. no. 6921

Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 50/25-30 No. 8729

For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 50/25-30 G4 No. 8721

Type KLF 50/25-30 F7 No. 8645

Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Electric heater battery

Type EHR-K 8/50/25-30 No. 8704

Type EHR-K 24/50/25-30 No. 8705

Heating elements enclosed in a galvanised steel casing with connecting flanges on both sides.

Temperature control system for electric heater battery

Type EHSD 16 Ref. no. 5003

Warm water heater battery



Type WHR 2/50/25-30 No. 8784


Type WHR 4/50/25-30 No. 8785

For in-duct installation.

Temperature control system for warm water heater battery

Type WHS HE Ref. no. 8319



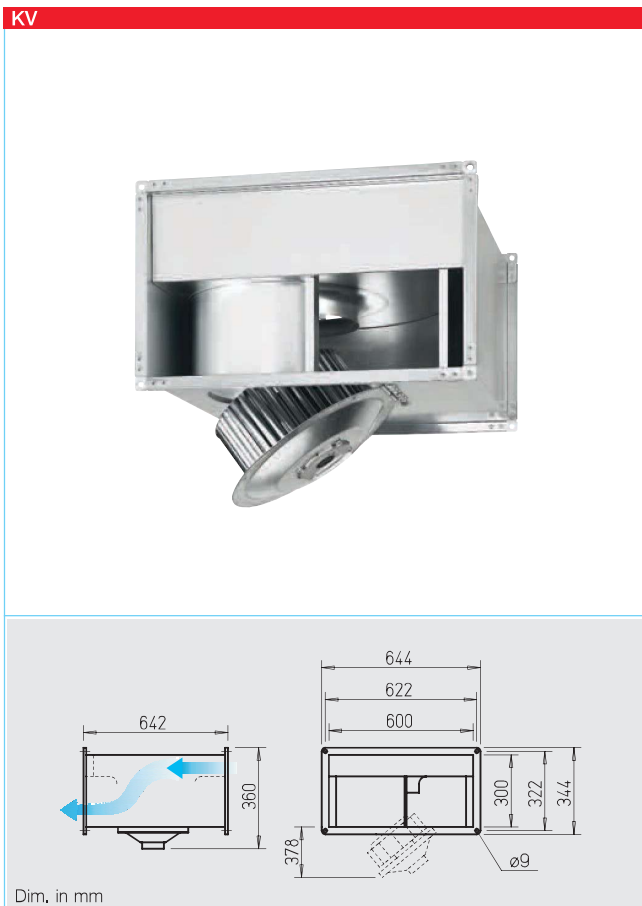

Rectangular centrifugal fan with forward curved impeller blades and swing-out motor impeller unit.

- Low-noise centrifugal impellers in aerodynamic galvanised steel casing for high pressure levels.
- Compact and flat design for use in extract and fresh air systems in commercial and industrial applications.

■ Specification

□ Casing

Made of galvanised steel and flanged on both ends. Space saving, compact design.

- Easy to clean and service thanks to the swing-out motor impeller unit.

□ Impeller

Forward curved centrifugal impeller made of galvanised steel, highly efficient with low noise levels. Aerodynamically optimised casing; intake air flow by means of an inlet nozzle.

□ Motor

Totally enclosed, maintenance-free external rotor motor with directly fitted impeller, protected to IP 44. Windings with protection against moisture. Ball bearing mounted and interference-free.

Dynamically balanced with resilient motor mounting bracket for low vibration and low noise operation.

□ Electrical connection

Terminal box (IP 55 for 3 ph., IP 65 for explosion-proof types) is mounted with permanently attached cable.

□ Motor protection

Through built-in thermal contacts which must be connected to a motor full protection device.

□ Speed control

By voltage reduction using a 5 speed transformer controller (recommended) or an electronic controller (stepless). The performance figures at corresponding voltages are given in the performance curve.

□ Sound Levels

Above the performance curve, total values and spectrum are given for:

- Sound level case breakout
 - Sound level intake
 - Sound level exhaust
- The sound power level (on intake) is additionally shown within the performance curve for corresponding control voltages. In the table below you can also find:
- Case breakout sound level at 4 m (free field conditions).


□ Installation

Possible in any position. Attention should be paid to accessibility/swing out.


Note	Page
Selection chart	372
Technical description	373
Design guidelines	10 on
Modul. system components	370

Type	Ref. no.	Air flow volume, free discharge	Nominal R.P.M.	Sound press. case breakout	Power consumption	Wiring diagram	Max. air flow temperature at Nom. vol.	Control	Weight net approx.	Speed controller 5-step without motor protect. unit	Speed controller 5-step with motor protect. unit	Motor full protection device to connect built-in thermal contacts
		l/s m³/h	min⁻¹	dB(A) in 4 m	kW A	No.	+°C	+°C	kg	Type Ref. no.	Type Ref. no.	Type Ref. no.
3-phase motor, 230/400 V, 50 Hz, protected to IP 44												
KVD 280/4/60/30	5684	3950	1300	45	1.67 5.4/3.1	860	65	60	35	TSD 5,5 1503	RDS 7 1578	MD 5849
Explosion-proof Ex e II, temperature class T1 – T3, 3-phase 230/400 V, 50 Hz, protection to IP 44												
KVD 280/4/60/30 Ex	6812	3450	1340	47	1.45 2.9	899	40	40	34	TSD 5,5 1503	— —	MSA 1289

KVD 280/4/60/30

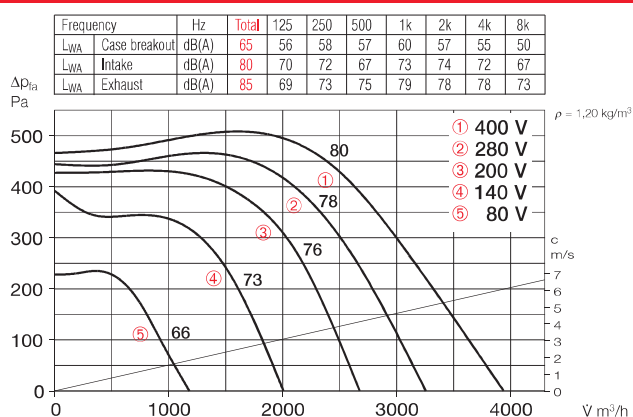

KVD 280/4/60/30 Ex

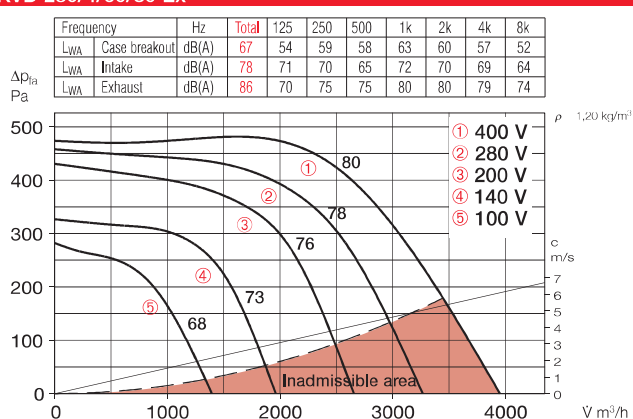

Accessory details Page

Shutters, grilles and louvres	420, 487 on
Filters, heaters and attenuators	421 on
Temperature control systems for heaters	427, 432 on
Speed controllers and motor full protection devices	525 on

Accessories

Gravity shutter

Type VK 60/30 Ref. no. 0877
External airflow operated gravity shutter made of polymer, light grey.

External louvres

Type WSG 60/30 Ref. no. 0112
Robust construction made of aluminium extrusion profile, natural colour anodised.

Volume control damper for ducting

Type JVK 60/30 Ref. no. 6913
Casing made with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 60/30 Ref. no. 0834
For cost effective adaption of rectangular fans into circular ducting systems with Ø 315 mm.

Flexible connectors

Type VS 60/30 Ref. no. 5697
Flexible in-duct connector with flanges on both sides.
– for Ex-fans
Type VS 60/30 Ex Ref. no. 0267

Counterflange

Type GF 60/30 Ref. no. 6922
Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 60/30-35 No. 8730
For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 60/30-35 G4 No. 8722
Type KLF 60/30-35 F7 No. 8646
Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Electric heater battery

Type EHR-K 15/60/30-35 No. 8706
Type EHR-K 30/60/30-35 No. 8707
Heating elements enclosed in a galvanised steel casing with connecting flanges on both sides.

Temperature control system for electric heater battery

Type EHSD 16 Ref. no. 5003


Warm water heater battery


Type WHR 2/60/30-35 No. 8786
Type WHR 4/60/30-35 No. 8787
For in-duct installation.

Temperature control system for warm water heater battery

Type WHS HE¹⁾ Ref. no. 8319

¹⁾ In model WHR 4/60/30-35 the heat output is reduced to 2200 W/h.



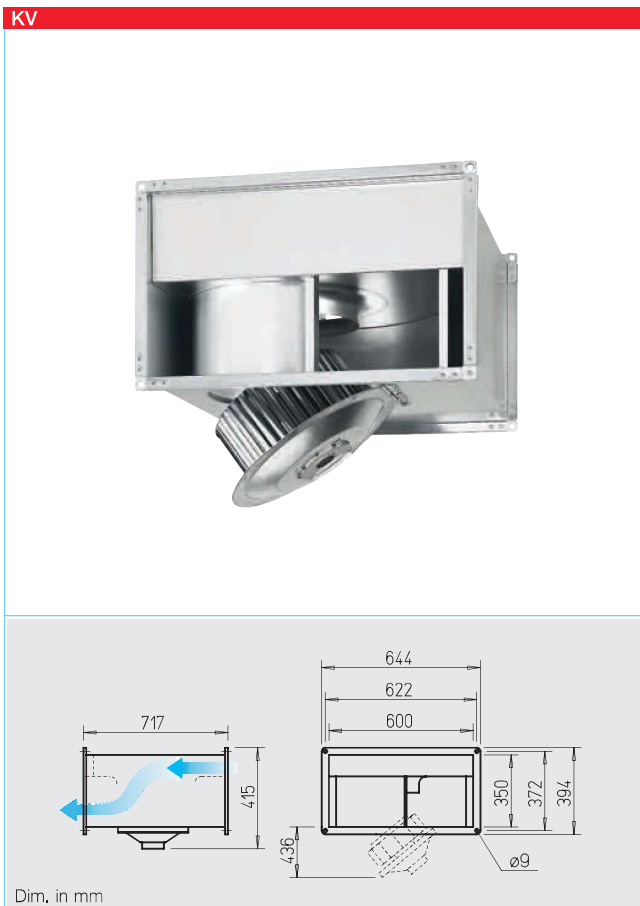

Rectangular centrifugal fan with forward curved impeller blades and swing-out motor impeller unit.

- Low-noise centrifugal impellers in aerodynamic galvanised steel casing for high pressure levels.
- Compact and flat design for use in extract and fresh air systems in commercial and industrial applications.

■ Specification

□ Casing

Made of galvanised steel and flanged on both ends. Space saving, compact design.

- Easy to clean and service thanks to the swing-out motor impeller unit.

□ Impeller

Forward curved centrifugal impeller made of galvanised steel, highly efficient with low noise levels. Aerodynamically optimised casing; intake air flow by means of an inlet nozzle.

□ Motor

Totally enclosed, maintenance-free external rotor motor with directly fitted impeller, protected to IP 44. Windings with protection against moisture. Ball bearing mounted and interference-free.

Dynamically balanced with resilient motor mounting bracket for low vibration and low noise operation.

□ Electrical connection

Terminal box (IP 55 for 3 ph., IP 65 for explosion-proof types) is mounted with permanently attached cable.

□ Motor protection

Through built-in thermal contacts which must be connected to a motor full protection device.

□ Speed control

By voltage reduction using a 5 speed transformer controller (recommended) or an electronic controller (stepless). The performance figures at corresponding voltages are given in the performance curve.

□ Sound Levels

Above the performance curve, total values and spectrum are given for:

- Sound level case breakout
 - Sound level intake
 - Sound level exhaust
- The sound power level (on intake) is additionally shown within the performance curve for corresponding control voltages. In the table below you can also find:
- Case breakout sound level at 4 m (free field conditions).

□ Installation

Possible in any position. Attention should be paid to accessibility/swing out.


Note	Page
Selection chart	372
Technical description	373
Design guidelines	10 on
Modul. system components	370

□ Explosion-proof models


Thermal motor protection through built-in PTC (positive temperature coefficient) thermistors which must be connected to a tripping unit MSA. Using this motor protection enables the speed control where a minimum voltage of 100 V must be maintained.

Type	Ref. no.	Air flow volume, free discharge	Nominal R.P.M.	Sound press. case breakout	Power consumption		Wiring diagram	Max. air flow temperature at		Weight net approx.	Speed controller 5-step		Motor full protection device to connect built-in thermal contacts	
		∇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	Nom. vol. +°C	Control +°C	kg	Type	Ref. no.	Type	Ref. no.
3-phase motor, 230/400 V, 50 Hz, protected to IP 44														
KVD 315/4/60/35	5686	4500	1350	48	2.06	6.8/3.9	860	60	55	42	TSD 5,5	1503	RDS 7	1578
Explosion-proof Ex e II, temperature class T1 – T3, 3-phase 230/400 V, 50 Hz, protection to IP 44														
KVD 315/4/60/35 Ex	6813	4200	1370	48	2.0	4.0	899	40	40	42	TSD 5,5	1503	—	MSA

KVD 315/4/60/35

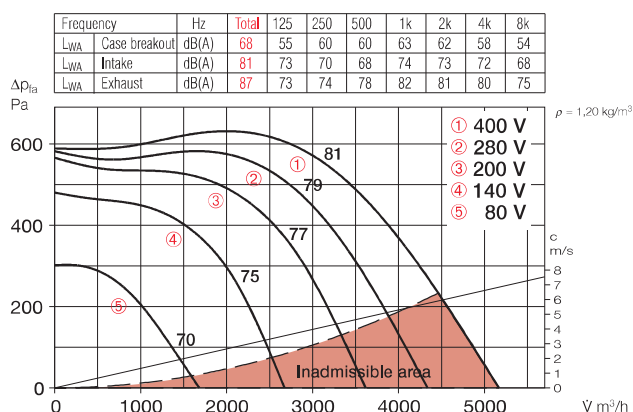

KVD 315/4/60/35 Ex

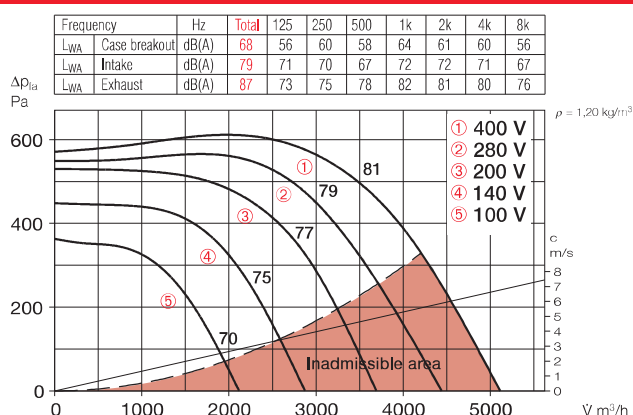

Accessory details Page

Shutters, grilles and louvres	420, 487 on
Filters, heaters and attenuators	421 on
Temperature control systems for heaters	427, 432 on
Speed controllers and motor full protection devices	525 on

Accessories

Gravity shutter

Type VK 60/35 Ref. no. 0878
External airflow operated gravity shutter made of polymer, light grey.

External louvres

Type WSG 60/35 Ref. no. 0113
Robust construction made of aluminium extrusion profile, natural colour anodised.

Volume control damper for ducting

Type JVK 60/35 Ref. no. 6914
Casing made with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 60/35 Ref. no. 0835
For cost effective adaption of rectangular fans into circular ducting systems with Ø 355 mm.

Flexible connectors

Type VS 60/35 Ref. no. 5698
Flexible in-duct connector with flanges on both sides.
– for Ex-fans
Type VS 60/35 Ex Ref. no. 0268

Counterflange

Type GF 60/35 Ref. no. 6923
Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 60/30-35 No. 8730
For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 60/30-35 G4 No. 8722
Type KLF 60/30-35 F7 No. 8646
Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Electric heater battery

Type EHR-K 15/60/30-35 No. 8706
Type EHR-K 30/60/30-35 No. 8707
Heating elements enclosed in a galvanised steel casing with connecting flanges on both sides.

Temperature control system for electric heater battery

Type EHSD 16 Ref. no. 5003



Warm water heater battery


Type WHR 2/60/30-35 No. 8786
Type WHR 4/60/30-35 No. 8787
For in-duct installation.

Temperature control system for warm water heater battery

Type WHS HE¹⁾ Ref. no. 8319

¹⁾ In model WHR 4/60/30-35 the heat output is reduced to 2200 W/h.



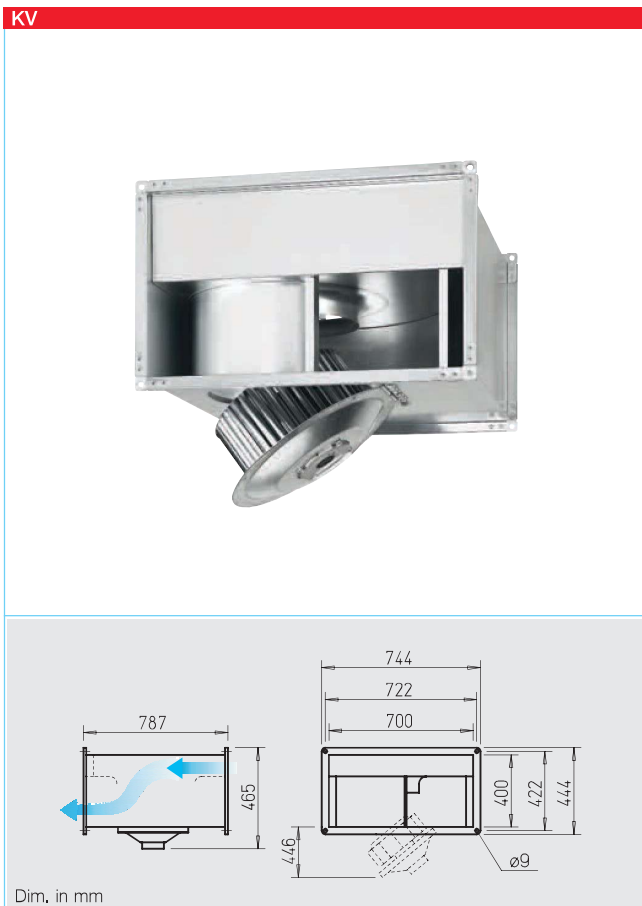

Rectangular centrifugal fan with forward curved impeller blades and swing-out motor impeller unit.

- Low-noise centrifugal impellers in aerodynamic galvanised steel casing for high pressure levels.
- Compact and flat design for use in extract and fresh air systems in commercial and industrial applications.

■ Specification

□ Casing

Made of galvanised steel and flanged on both ends. Space saving, compact design.

- Easy to clean and service thanks to the swing-out motor impeller unit.

□ Impeller

Forward curved centrifugal impeller made of galvanised steel, highly efficient with low noise levels. Aerodynamically optimised casing; intake air flow by means of an inlet nozzle.

□ Motor

Totally enclosed, maintenance-free external rotor motor with directly fitted impeller, protected to IP 44. Windings with protection against moisture. Ball bearing mounted

and interference-free. Dynamically balanced with resilient motor mounting bracket for low vibration and low noise operation.

□ Electrical connection

Terminal box (IP 55 for 3 ph., IP 65 for explosion-proof types) is mounted with permanently attached cable.

□ Motor protection

Through built-in thermal contacts which must be connected to a motor full protection device.

□ Speed control

By voltage reduction using a 5 speed transformer controller (recommended) or an electronic controller (stepless). The performance figures at corresponding voltages are given in the performance curve.

□ Sound Levels

Above the performance curve, total values and spectrum are given for:

- Sound level case breakout
 - Sound level intake
 - Sound level exhaust
- The sound power level (on intake) is additionally shown within the performance curve for corresponding control voltages. In the table below you can also find:
- Case breakout sound level at 4 m (free field conditions).


□ Installation

Possible in any position. Attention should be paid to accessibility/swing out.


Note	Page
Selection chart	372
Technical description	373
Design guidelines	10 on
Modul. system components	370

Type	Ref. no.	Air flow volume, free discharge	Nominal R.P.M.	Sound press. case breakout	Power consumption		Wiring diagram	Max. air flow temperature at Nom. vol.		Weight net approx.	Speed controller without motor protect. unit		5-step with motor protect. unit		Motor full protection device to connect built-in thermal contacts	
		Ų m³/h	min ⁻¹	dB(A) in 4 m	kW	A	No.	+°C	+°C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
3-phase motor, 230/400 V, 50 Hz, protected to IP 44																
KVD 355/8/70/40	5687	4850	680	35	1.02	3.9/2.3	860	70	70	49	TSD 5,5	1503	RDS 4	1316	MD	5849
KVD 355/6/70/40	5688	5000	830	42	1.53	5.5/3.2	860	60	60	54	TSD 5,5	1503	RDS 4	1316	MD	5849
KVD 355/4/70/40	5689	5800	1400	54	3.48	10.4/6.0	860	70	50	60	TSD 11	1513	RDS 11	1332	MD	5849
Explosion-proof Ex e II, temperature class T1 – T3, 3-phase 230/400 V, 50 Hz, protection to IP 44																
KVD 355/6/70/40 Ex	6814	4800	800	48	1.40	2.4	899	40	40	49	TSD 3.0	1502	—	—	MSA	1289


KVD 355/8/70/40

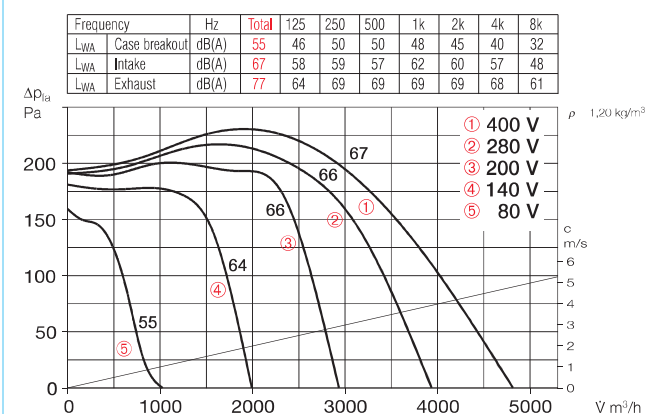


KVD 355/6/70/40

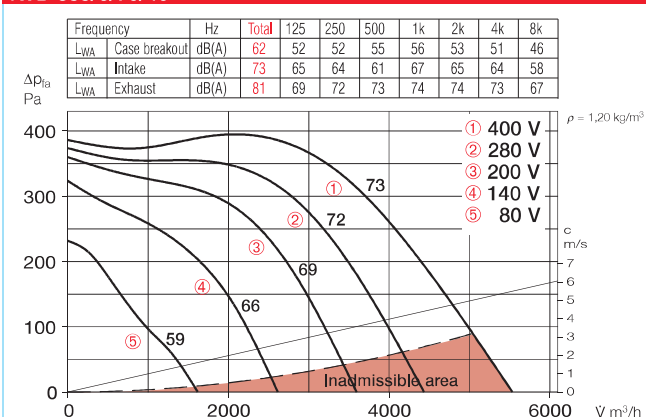

KVD 355/4/70/40

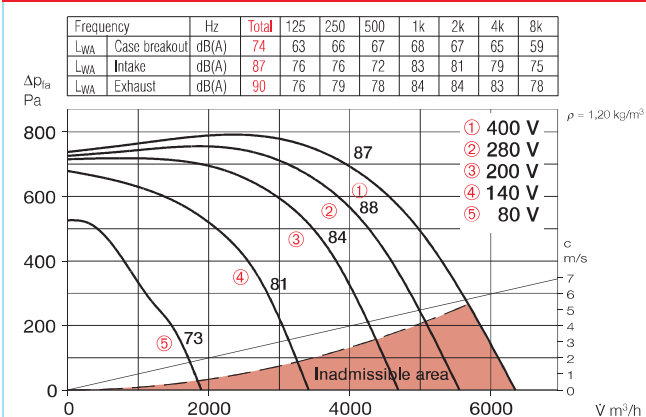

KVD 355/6/70/40 Ex

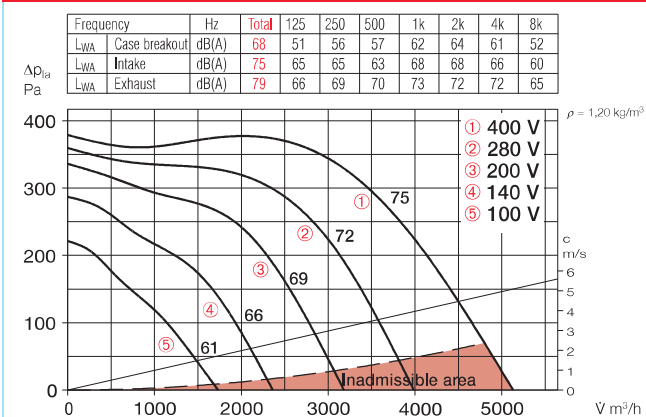

Accessories

Gravity shutter

Type VK 70/40 Ref. no. 0879

External airflow operated gravity shutter made of polymer, light grey.

External louvres

Type WSG 70/40 Ref. no. 0114

Robust construction made of aluminium extrusion profile, natural colour anodised.

Volume control damper for ducting

Type JVK 70/40 Ref. no. 6915

Casing made with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 70/40 Ref. no. 0840

For cost effective adaption of rectangular fans into circular ducting systems with Ø 400 mm.

Flexible connectors

Type VS 70/40 Ref. no. 5699

Flexible in-duct connector with flanges on both sides.

– for Ex-fans

Type VS 70/40 Ex Ref. no. 0269

Counterflange

Type GF 70/40 Ref. no. 6924

Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 70/40 Ref. no. 8731

For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 70/40 G4 No. 8723

Type KLF 70/40 F7 No. 8647

Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Warm water heater battery

Type WHR 2/70/40 No. 8788



Type WHR 4/70/40 No. 8789

For in-duct installation.


Temperature control system for warm water heater battery

Type WHS HE¹⁾ Ref. no. 8319

¹⁾ In model WHR 4/70/40 the heat output is reduced to 2200 l/h.



Accessory details	Page
Shutters, grilles and louvres	420, 487 on
Filters, heaters and attenuators	421 on
Temperature control systems for heaters	427, 432 on
Speed controllers and motor full protection devices	525 on

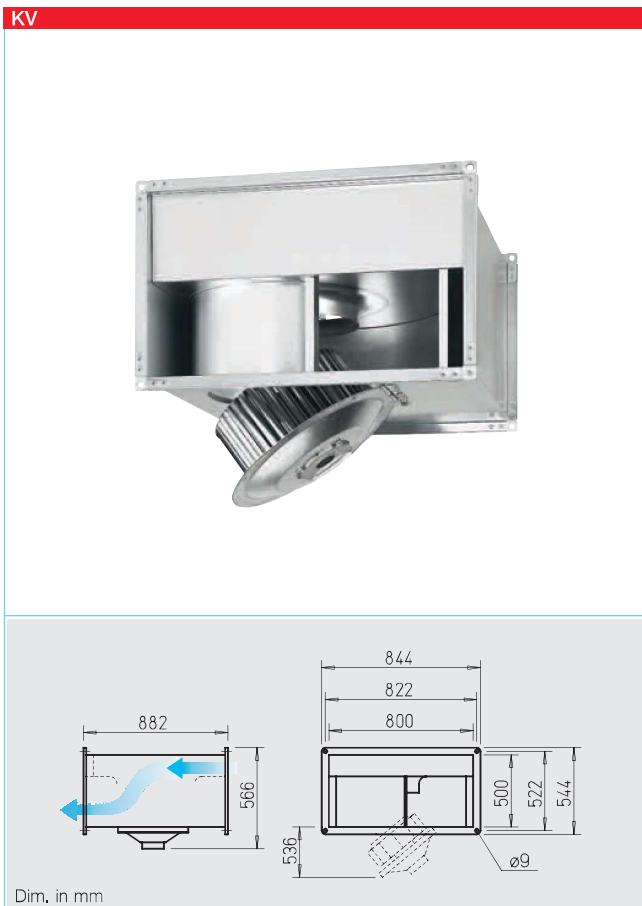

Rectangular centrifugal fan with forward curved impeller blades and swing-out motor impeller unit.

- Low-noise centrifugal impellers in aerodynamic galvanised steel casing for high pressure levels.
- Compact and flat design for use in extract and fresh air systems in commercial and industrial applications.

■ Specification

□ Casing

Made of galvanised steel and flanged on both ends. Space saving, compact design.

- Easy to clean and service thanks to the swing-out motor impeller unit.

□ Impeller

Forward curved centrifugal impeller made of galvanised steel, highly efficient with low noise levels. Aerodynamically optimised casing; intake air flow by means of an inlet nozzle.

□ Motor

Totally enclosed, maintenance-free external rotor motor with directly fitted impeller, protected to IP 44. Windings with protection against moisture. Ball bearing mounted

and interference-free. Dynamically balanced with resilient motor mounting bracket for low vibration and low noise operation.

□ Electrical connection

Terminal box (IP 55) is mounted with a permanently attached cable.

□ Motor protection

Through built-in thermal contacts which must be connected to a motor full protection device.

□ Speed control

By voltage reduction using a 5 speed transformer controller (recommended) or an electronic controller (stepless). The performance figures at corresponding voltages are given in the performance curve.

□ Sound Levels

Above the performance curve, total values and spectrum are given for:

- Sound level case breakout
- Sound level intake
- Sound level exhaust

The sound power level (on intake) is additionally shown within the performance curve for corresponding control voltages. In the table below you can also find:

- Case breakout sound level at 4 m (free field conditions).


□ Installation

Possible in any position. Attention should be paid to accessibility/swing out.


Note	Page
Selection chart	372
Technical description	373
Design guidelines	10 on
Modul. system components	370

Type	Ref. no.	Air flow volume, free discharge	Nominal R.P.M.	Sound press. case breakout	Power consumption		Wiring diagram	Max. air flow temperature at		Weight net approx.	Speed controller 5-step				Motor full protection device to connect built-in thermal contacts	
		∇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+°C	+°C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
3-phase motor, 230/400 V, 50 Hz, protected to IP 44																
KVD 400/8/80/50	5690	5400	640	38	1.29	5.1/2.9	860	70	70	66	TSD 5,5	1503	RDS 4	1316	MD	5849
KVD 400/6/80/50	5691	7600	860	45	2.81	9.1/5.3	860	70	50	70	TSD 7,0	1504	RDS 7	1578	MD	5849

KVD 400/8/80/50

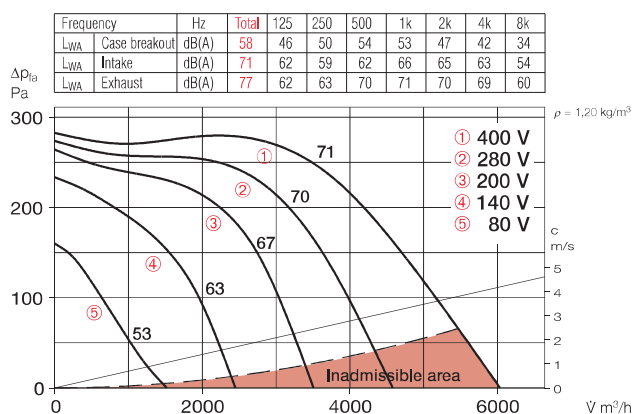

KVD 400/6/80/50

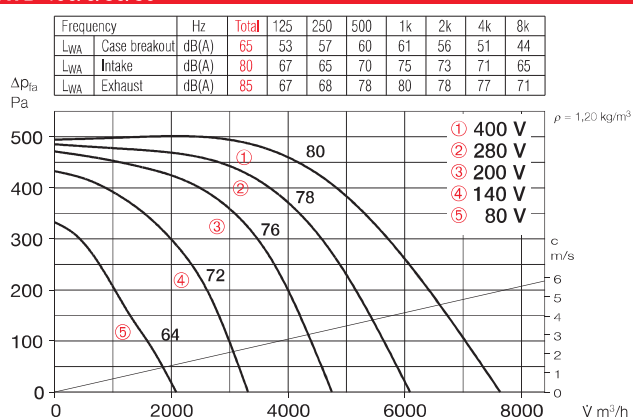

Accessories

Gravity shutter

Type VK 80/50 Ref. no. 0880

External airflow operated gravity shutter made of polymer, light grey.

External louvres

Type WSG 80/50 Ref. no. 0115

Robust construction made of aluminium extrusion profile, natural colour anodised.

Volume control damper for ducting

Type JVK 80/50 Ref. no. 6916

Casing made with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 80/50 Ref. no. 0842

For cost effective adaption of rectangular fans into circular ducting systems with Ø 500 mm.

Flexible connectors

Type VS 80/50 Ref. no. 5700

Flexible in-duct connector with flanges on both sides.

Counterflange

Type GF 80/50 Ref. no. 6925

Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 80/50 Ref. no. 8732

For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 80/50 G4 No. 8670

Type KLF 80/50 F7 No. 8654


Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Warm water heater battery

Type WHR 2/80/50 No. 8795


Type WHR 4/80/50 No. 8796

For in-duct installation.



Accessory details Page

Shutters, grilles and louvres	420, 487 on
Filters, heaters and attenuators	421 on
Speed controllers and motor full protection devices	525 on

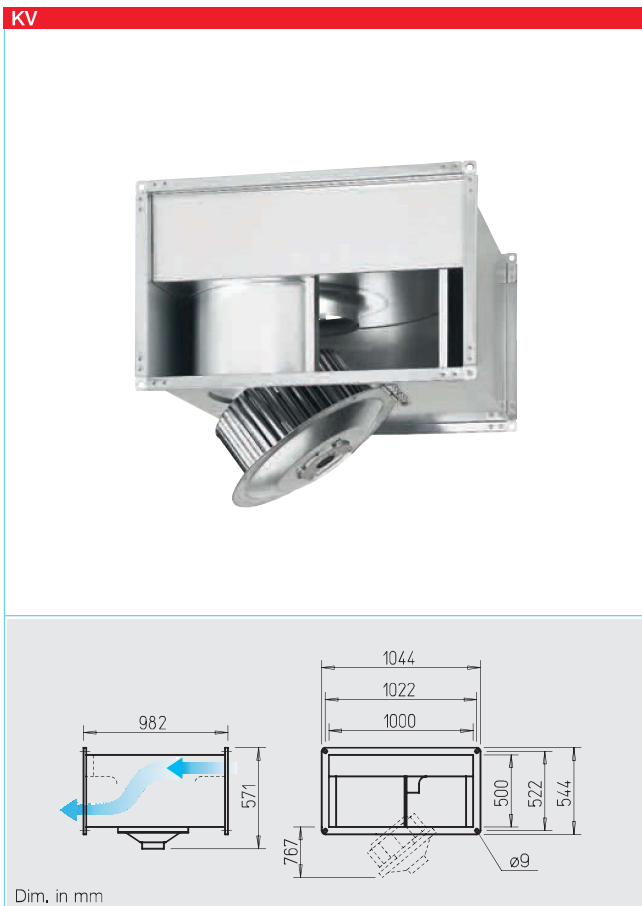

Rectangular centrifugal fan with forward curved impeller blades and swing-out motor impeller unit.

- Low-noise centrifugal impellers in aerodynamic galvanised steel casing for high pressure levels.
- Compact and flat design for use in extract and fresh air systems in commercial and industrial applications.

■ Specification

□ Casing

Made of galvanised steel and flanged on both ends. Space saving, compact design.

- Easy to clean and service thanks to the swing-out motor impeller unit.

□ Impeller

Forward curved centrifugal impeller made of galvanised steel, highly efficient with low noise levels. Aerodynamically optimised casing; intake air flow by means of an inlet nozzle.

□ Motor

Totally enclosed, maintenance-free external rotor motor with directly fitted impeller, protected to IP 44. Windings with protection against moisture. Ball bearing mounted and interference-free.

Dynamically balanced with resilient motor mounting bracket for low vibration and low noise operation.

□ Electrical connection

Terminal box (IP 55) is mounted with a permanently attached cable.

□ Motor protection

Through built-in thermal contacts which must be connected to a motor full protection device.

□ Speed control

By voltage reduction using a 5 speed transformer controller (recommended) or an electronic controller (stepless). The performance figures at corresponding voltages are given in the performance curve.

□ Sound Levels

Above the performance curve, total values and spectrum are given for:

- Sound level case breakout
- Sound level intake
- Sound level exhaust

The sound power level (on intake) is additionally shown within the performance curve for corresponding control voltages. In the table below you can also find:

- Case breakout sound level at 4 m (free field conditions).


□ Installation

Possible in any position. Attention should be paid to accessibility/swing out.


Note	Page
Selection chart	372
Technical description	373
Design guidelines	10 on
Modul. system components	370

Type	Ref. no.	Air flow volume, free discharge	Nominal R.P.M.	Sound press. case breakout	Power consumption		Wiring diagram	Max. air flow temperature at Nom. vol.		Control	Weight net approx.	Speed controller 5-step				Motor full protection device to connect built-in thermal contacts	
												without motor protect. unit		with motor protect. unit			
		∇ m³/h	min⁻¹	dB(A) in 4 m	kW	A	No.	+°C	+°C		kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
3-phase motor, 230/400 V, 50 Hz, protected to IP 44																	
KVD 450/8/100/50	5692	7600	690	46	2.26	8.6/5.0	860	60	50		90	TSD 7,0	1504	RDS 7	1578	MD	5849
KVD 450/6/100/50	5693	8500	870	50	3.65	11.6/6.7	860	70	50		90	TSD 11	1513	RDS 11	1332	MD	5849

KVD 450/8/100/50

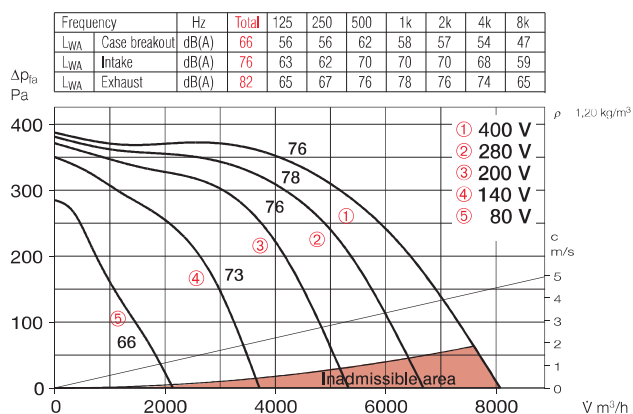

KVD 450/6/100/50

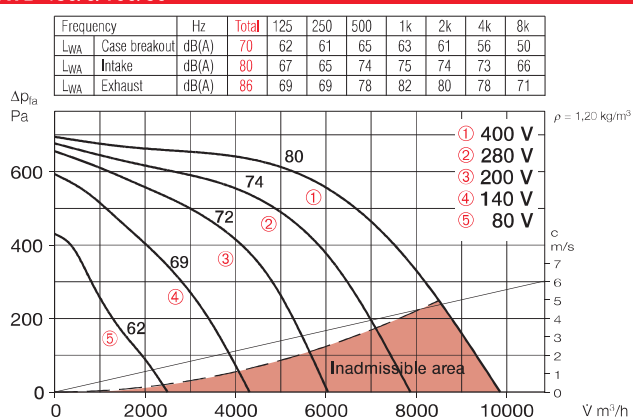

Accessories

Gravity shutter

Type VK 100/50 Ref. no. 0881

External airflow operated gravity shutter made of polymer, light grey.

External louvres

Type WSG 100/50 Ref. no. 0116

Robust construction made of aluminium extrusion profile, natural colour anodised.

Volume control damper for ducting

Type JVK 100/50 Ref. no. 6917

Casing made with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 100/50 Ref. no. 0843

For cost effective adaption of rectangular fans into circular ducting systems with Ø 500 mm.

Flexible connectors

Type VS 100/50 Ref. no. 5701

Flexible in-duct connector with flanges on both sides.

Counterflange

Type GF 100/50 Ref. no. 6926

Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 100/50 Ref. no. 8733

For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 100/50 G4 No. 8671

Type KLF 100/50 F7 No. 8655



Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Warm water heater battery

Type WHR 2/100/50 No. 8797

Type WHR 4/100/50 No. 8798

For in-duct installation.



Accessory details Page

Shutters, grilles and louvres	420, 487 on
Filters, heaters and attenuators	421 on
Speed controllers and motor full protection devices	525 on



Rectangular EC centrifugal fan with backward curved impeller and swing-out motor impeller unit.

- Highly efficient EC-motor for lowest operating costs.
 - High performance with high efficiency impellers.
 - Use in extract and fresh air systems for conveying higher air flow volume.
 - Suitable for extraction of polluted air.
- **Special features**
- High pressure and high volume specific centrifugal fan with high efficiency.
 - Particularly easy to service (cleaning) thanks to the swing-out motor impeller unit.
 - For cleaning, easy access and therefore suitable for extraction of polluted air.
 - Compact design, less space requirement and straight through-flow.


KR EC

Suitable for polluted air.



(fig. similar)

Dim. in mm

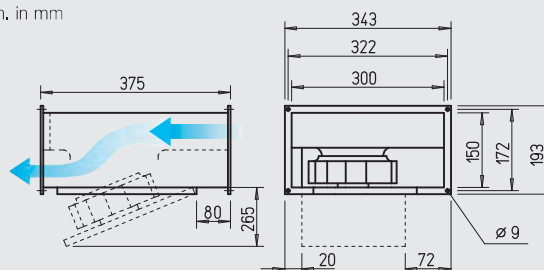

■ Specification

- **Casing**
Made of galvanised steel.
Flanged (20 mm) on both ends for in-duct installation.
- **Impeller**
Centrifugal, backward curved impeller made of polymer.
Aerodynamically optimised, intake air flow by means of an inlet nozzle.
- **Motor**
Energy saving, speed controllable EC-external rotor motors with highest efficiency, protection to IP 44. With ball bearings, maintenance-free and interference-free. Motor and impeller are dynamically balanced.

□ Motor protection

Integrated electronic temperature monitoring for EC-motor and electronics.

□ Speed control

Stepless speed control with potentiometer or stepless speed control with universal control system (see table). Duties at different speeds are exemplarily given in the performance curve.

□ Electrical connection

Terminal box (IP 54) fitted to flying lead.

□ Installation

Installation in any position.
Allowance must be made for the motor swing out access.

Note

Page

Selection chart	372
Technical description	373
Design guidelines	10 on
Modul. system components	370

■ Sound levels


Total sound power levels and the spectrum figures in dB(A) are given for:

- Sound level case breakout
 - Sound level intake
 - Sound level exhaust
- In the table below as well as underneath the performance curve you can find additionally the sound pressure level at 4 m (free field conditions).

Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Motor power	Current	Wiring diagram	max. air flow temperature	Weight net approx.	Universal control system	Speed-potentiometer		
											flush	surface	
		ℳ m³/h	min ⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Single Phase, 230 V, 50/60 Hz, EC motor, protection to IP 44													
KRW EC 180/30/15	8168	660	3700	44	0.11	0.90	979	60	6.2	EUR EC ^{1) 2)} 1347	PU 10 ¹⁾ 1734	PA 10 ¹⁾ 1735	

1) Multiple EC fans can normally be connected 2) alternative electronic differential pressure/temp. controller (EDR/ETR, No. 1437/1438) or three-step speed controller (SU/SA, No. 4266/4267), s. accessories

KRW EC 180/30/15

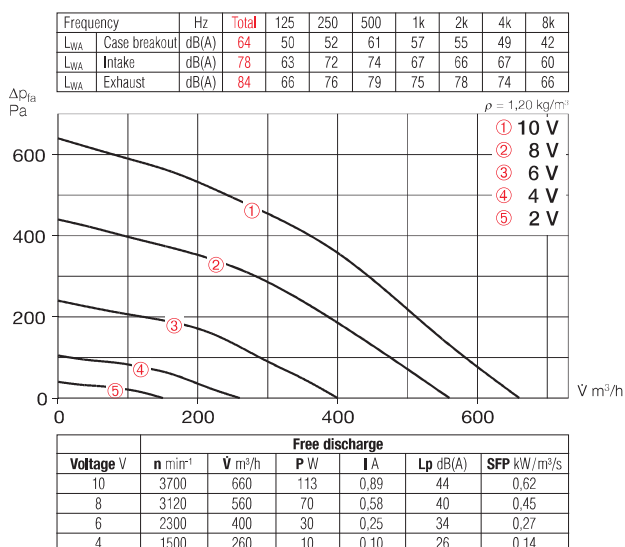

Accessories

Gravity shutter

Type VK 30/15 Ref. no. 0735

Air stream operated louvres, light grey polymer.

External louvre

Type WSG 30/15 Ref. no. 0108

Heavy duty construction made from profile anodised aluminium extrusion.

Vol. control damper for ducting

Type JVK 30/15 Ref. no. 6927

Casing with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 30/15 Ref. no. 0831

For cost effective adaption of rectangular fans into circular ducting systems with Ø 160 mm.

Flexible connectors

Type VS 30/15 Ref. no. 6928

Flexible in-duct connector with flanges on both sides.

Counterflange

Type GF 30/15 Ref. no. 6918

Flange frames made of galvanised steel for connection to ducting.



Accessory details Page

Shutters, grilles and louvres	420, 487 on
Filters, heater batteries and attenuators	421 on
Universal control system, electronic controller, speed-potentiometer	539 on



KR EC


Suitable for polluted air.



(Fig. similar)

Rectangular EC centrifugal fan with backward curved impeller and swing-out motor impeller unit.

- Highly efficient EC-motor for lowest operating costs.
 - High performance with high efficiency impellers.
 - Use in extract and fresh air systems for conveying higher air flow volume.
 - Suitable for extraction of polluted air.
- **Special features**
- High pressure and high volume specific centrifugal fan with high efficiency.
 - Particularly easy to service (cleaning) thanks to the swing-out motor impeller unit.
 - For cleaning, easy access and therefore suitable for extraction of polluted air.
 - Compact design, less space requirement and straight through-flow.

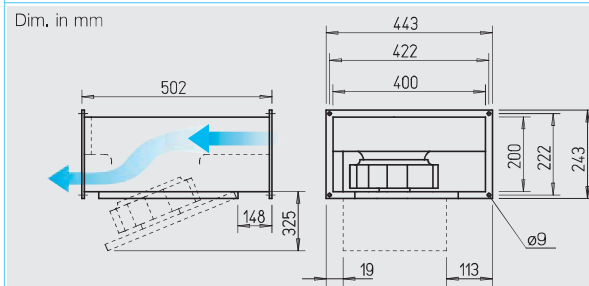

■ Specification

- **Casing**
Made of galvanised steel.
Flanged (20 mm) on both ends for in-duct installation.
- **Impeller**
Centrifugal, backward curved impeller made of polymer.
Aerodynamically optimised, intake air flow by means of an inlet nozzle.
- **Motor**
Energy saving, speed controllable EC-external rotor motors with highest efficiency, protection to IP 44. With ball bearings, maintenance-free and interference-free. Motor and impeller are dynamically balanced.

□ Motor protection

Integrated electronic temperature monitoring for EC-motor and electronics.

□ Speed control

Stepless speed control with potentiometer or stepless speed control with universal control system (see table). Duties at different speeds are exemplarily given in the performance curve.

□ Electrical connection

Terminal box (IP 54) fitted to flying lead.

□ Installation

Installation in any position. Allowance must be made for the motor swing out access.

Note	Page
Selection chart	372
Technical description	373
Design guidelines	10 on
Modul. system components	370

■ Sound levels

Total sound power levels and the spectrum figures in dB(A) are given for:


- Sound level case breakout
- Sound level intake
- Sound level exhaust

In the table below as well as underneath the performance curve you can find additionally the sound pressure level at 4 m (free field conditions).

Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Motor power	Current	Wiring diagram	max. air flow temperature	Weight net approx.	Universal control system	Speed-potentiometer				
											flush	surface			
		ℳ m³/h	min ⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Single Phase, 230 V, 50/60 Hz, EC motor, protection to IP 44															
KRW EC 225/40/20	8169	1430	2650	46	0,16	1,26	979	60	9,8	EUR EC ^{1) 2)} 1347	PU 10 ¹⁾ 1734	PA 10 ¹⁾ 1735			

¹⁾ Multiple EC fans can normally be connected ²⁾ alternative electronic differential pressure/temp. controller (EDR/ETR, No. 1437/1438) or three-step speed controller (SU/SA, No. 4266/4267), s. accessories

KRW EC 225/40/20

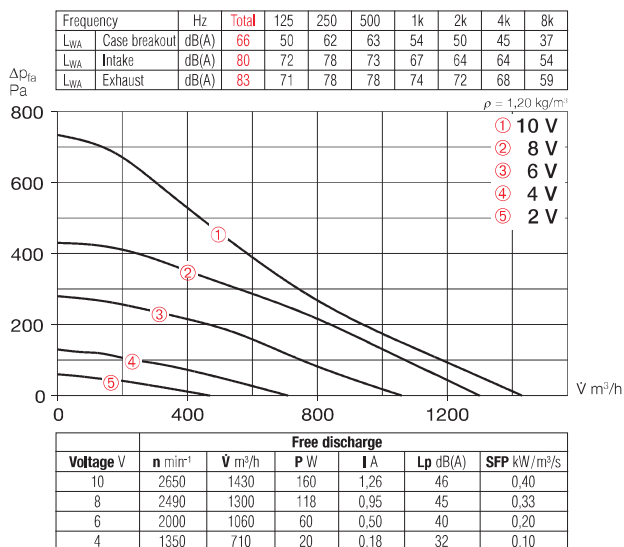

Accessory details Page

Shutters, grilles and louvers 420, 487 on
Filters, heater batteries and attenuators 421 on
Temperature control systems for heater batteries 427, 432 on
Universal control system, electronic controller, speed-potentiometer 539 on

Accessories

Gravity shutter

Type VK 40/20 Ref. no. 0874

Air stream operated louvers, light grey polymer.

External louver

Type WSG 40/20 Ref. no. 0109

Heavy duty construction made from profile anodised aluminium extrusion.

Vol. control damper for ducting

Type JVK 40/20 Ref. no. 6910

Casing with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 40/20 Ref. no. 0832

For cost effective adaption of rectangular fans into circular ducting systems with Ø 200 mm.

Flexible connectors

Type VS 40/20 Ref. no. 5694

Flexible in-duct connector with flanges on both sides.

Counterflange

Type GF 40/20 Ref. no. 6919

Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 40/20 Ref. no. 8728

For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 40/20 G4 No. 8720

Type KLF 40/20 F7 No. 8644

Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Electric heater battery

Type EHR-K 6/40/20 No. 8702

Type EHR-K 15/40/20 No. 8703

Heating elements enclosed in a galvanised steel casing with connecting flanges on both sides.

Temperature control system for electric heater battery

Type EHSD 16 Ref. no. 5003

Warm water heater battery


Type WHR 2/40/20 No. 8782

Type WHR 4/40/20 No. 8783

For in-duct installation.

Temperature control system for warm water heater battery

Type WHS HE Ref. no. 8319




KR EC

Suitable for polluted air.



(Fig. similar)

Dim. in mm

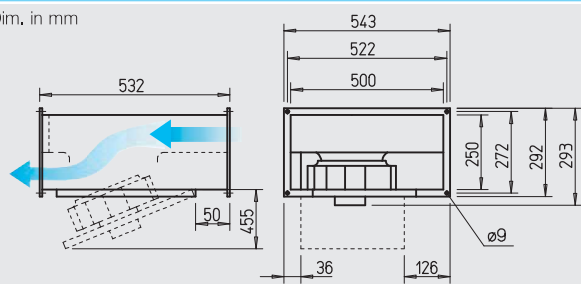

■ Features of KR EC and SKR EC

- Highly efficient EC-motor for lowest operating costs.
- High pressure and high volume with high efficiency centrifugal fan.
- Particularly easy to service (cleaning) thanks to the swing-out motor impeller unit.
- For cleaning, easy access and therefore suitable for extraction of polluted air.
- Straight through-flow.
- Compact design, convenient installation.

■ Special features of SKR EC

- Lowest sound levels for intake and case breakout at higher power density.

■ Specification

□ Casing KR EC

Made of galvanised steel. Flanged (20 mm) on both ends for in-duct installation.

□ Casing SKR EC

As above, but with additional sound insulation with 50 mm thick mineral fibre board, inside lined with a sound deadening perforated plate.

■ Common features of KR EC and SKR EC

□ Impeller

Centrifugal, backward curved impeller made of polymer. Aerodynamically optimised, intake air flow by means of an inlet nozzle.

SKR EC – Sound insulated




Lowest sound levels for intake and case breakout at higher power density.

Use in extract and fresh air systems with specific requirements for low noise levels.



Dim. in mm

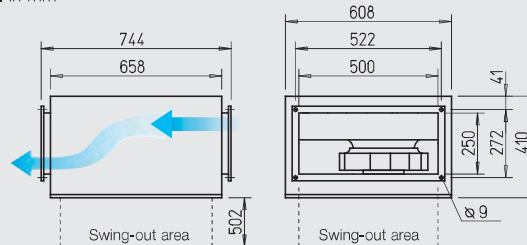

□ Motor

Energy-saving, speed controllable EC-external rotor motors with highest efficiency, protection to IP 44 (SKR EC IP 54). With ball bearings, maintenance-free and interference-free. Motor and impeller are dynamically balanced.

□ Motor protection

Integrated electronic temperature monitoring for EC-motor and electronics.

□ Speed control

Stepless speed control with potentiometer or stepless speed control with universal control system (see table). Duties at different speeds are exemplarily given in the performance curve.

□ Electrical connection

Terminal box (IP 54) fitted to flying lead.

□ Installation

Installation in any position. Allowance must be made for the motor swing out access.

■ Sound levels


Total sound power levels and the spectrum figures in dB(A) are given for:

- Sound level case breakout
 - Sound level intake
 - Sound level exhaust
- In the table below as well as underneath the performance curve you can find additionally the sound pressure level at 4 m (free field conditions).


Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Motor power	Current	Wiring diagram	max. air flow temperature	Weight net approx.	Universal control system	Speed-potentiometer				
		∇ m³/h	min ⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Single Phase, 230 V, 50/60 Hz, EC motor, protection to IP 44															
KRW EC 315/50/25	8170	1410	3080	44	0.16	1.24	979	60	13.8	EUR EC ^{1) 2)}	1347	PU 10 ¹⁾	1734	PA 10 ¹⁾	1735
Sound insulated model SKR EC – single phase, 230 V, 50/60 Hz, EC motor, protection to IP 54															
SKRW EC 315/50/25	8182	2600	2020	47	0.36	1.57	1066	60	34,0	EUR EC ^{1) 2)}	1347	PU 10 ¹⁾	1734	PA 10 ¹⁾	1735

¹⁾ Multiple EC fans can normally be connected ²⁾ alternative electronic differential pressure/temp. controller (EDR/ETR, No. 1437/1438) or three-step speed controller (SU/SA, No. 4266/4267), s. accessories

KRW EC 315/50/25

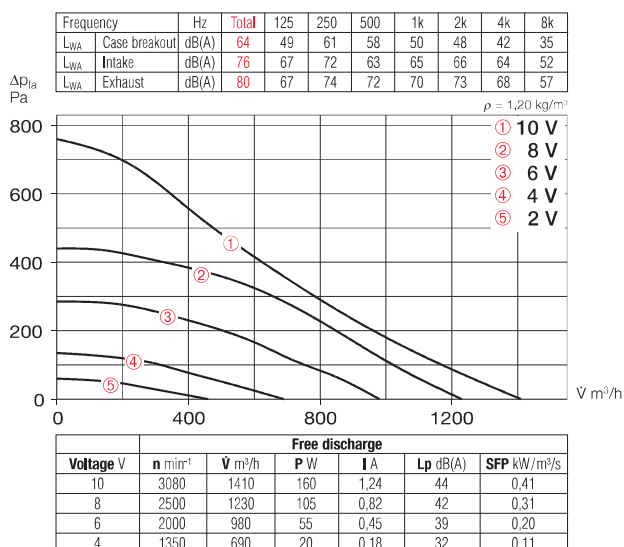

SKRW EC 315/50/25

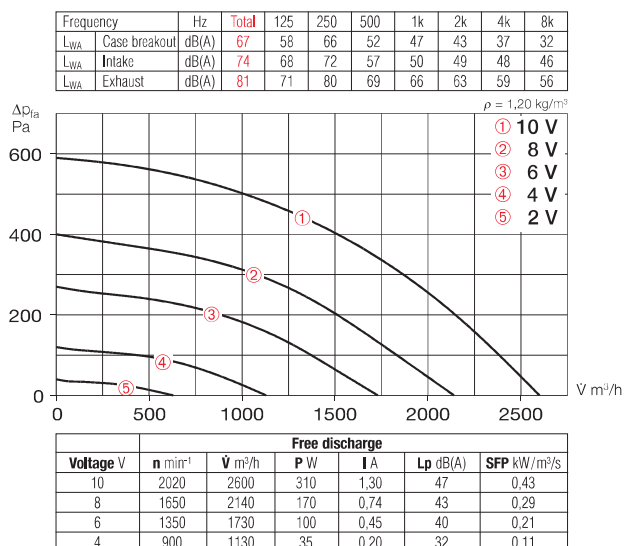

Accessory details Page

Shutters, grilles and louvres 420, 487 on
Filters, heater batteries and attenuators 421 on
Temperature control systems for heater batteries 427, 432 on
Universal control system, electronic controller, speed-potentiometer 539 on

Accessories

Gravity shutter

Type VK 50/25 Ref. no. 0875

Air stream operated louvres, light grey polymer.

External louver

Type WSG 50/25 Ref. no. 0110

Heavy duty construction made from profile anodised aluminium extrusion.

Vol. control damper for ducting

Type JVK 50/25 Ref. no. 6911

Casing with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 50/25 Ref. no. 0833

For cost effective adaption of rectangular fans into circular ducting systems with Ø 250 mm.

Flexible connectors

Type VS 50/25 Ref. no. 5695

Flexible in-duct connector with flanges on both sides.

Counterflange

Type GF 50/25 Ref. no. 6920

Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 50/25-30 No. 8729

For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 50/25-30 G4 No. 8721

Type KLF 50/25-30 F7 No. 8645

Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Electric heater battery

Type EHR-K 8/50/25-30 No. 8704

Type EHR-K 24/50/25-30 No. 8705

Heating elements enclosed in a galvanised steel casing with connecting flanges on both sides.

Temperature control system for electric heater battery

Type EHSD 16 Ref. no. 5003

Warm water heater battery


Type WHR 2/50/25-30 No. 8784

Type WHR 4/50/25-30 No. 8785

For in-duct installation.

Temperature control system for warm water heater battery

Type WHS HE Ref. no. 8319




KR EC

Suitable for polluted air.



(Fig. similar)

Dim, in mm

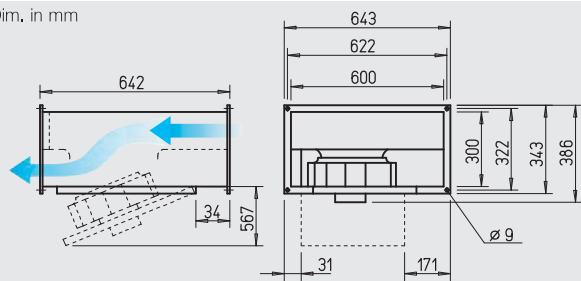

■ Features of KR EC and SKR EC

- Highly efficient EC-motor for lowest operating costs.
- High pressure and high volume with high efficiency centrifugal fan.
- Particularly easy to service (cleaning) thanks to the swing-out motor impeller unit.
- For cleaning, easy access and therefore suitable for extraction of polluted air.
- Straight through-flow.
- Compact design, convenient installation.

■ Special features of SKR EC

- Lowest sound levels for intake and case breakout at higher power density.

■ Specification

□ Casing KR EC

Made of galvanised steel. Flanged (20 mm) on both ends for in-duct installation.

□ Casing SKR EC

As above, but with additional sound insulation with 50 mm thick mineral fibre board, inside lined with a sound deadening perforated plate.

■ Common features of KR EC and SKR EC

□ Impeller

Centrifugal, backward curved impeller made of polymer. Aerodynamically optimised, intake air flow by means of an inlet nozzle.

SKR EC – Sound insulated




Lowest sound levels for intake and case breakout at higher power density.

Use in extract and fresh air systems with specific requirements for low noise levels.



Dim, in mm

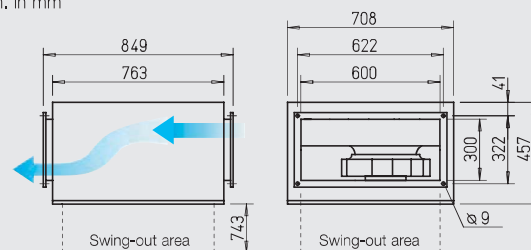

□ Motor

Energy-saving, speed controllable EC-external rotor motors with highest efficiency, protection to IP 44. With ball bearings, maintenance-free and interference-free. Motor and impeller are dynamically balanced.

□ Motor protection

Integrated electronic temperature monitoring for EC-motor and electronics.

□ Speed control

Stepless speed control with potentiometer or stepless speed control with universal control system (see table). Duties at different speeds are exemplarily given in the performance curve.

□ Electrical connection

Terminal box (IP 54) fitted to flying lead.

□ Installation

Installation in any position. Allowance must be made for the motor swing out access.

■ Sound levels

Total sound power levels and the spectrum figures in dB(A) are given for:


- Sound level case breakout
 - Sound level intake
 - Sound level exhaust
- In the table below as well as underneath the performance curve you can find additionally the sound pressure level at 4 m (free field conditions).

Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Motor power	Current	Wiring diagram	max. air flow temperature	Weight net approx.	Universal control system	Speed-potentiometer flush	Speed-potentiometer surface
		m^3/h	min^{-1}	dB(A) in 4 m	kW	A	No.	$^{\circ}\text{C}$	kg	Type Ref. no.	Type Ref. no.	Type Ref. no.
Single Phase, 230 V, 50/60 Hz, EC motor, protection to IP 54												
KRW EC 355/60/30	8171	3110	1650	46	0.37	1.59	1066	60	25.0	EUR EC ^{1) 2)} 1347	PU 10 ¹⁾ 1734	PA 10 ¹⁾ 1735
Sound insulated model SKR EC – single phase, 230 V, 50/60 Hz, EC motor, protection to IP 54												
SKRW EC 355/60/30	8176	3950	2200	51	0.84	3.94	982	60	44.5	EUR EC ^{1) 2)} 1347	PU 10 ¹⁾ 1734	PA 10 ¹⁾ 1735
Sound insulated model SKR EC – three phase, 400 V, 50/60 Hz, EC motor, protection to IP 54												
SKRD EC 355/60/30	8296	4550	2500	52	1.16	1.81	1005	60	44.5	EUR EC ^{1) 2)} 1347	PU 10 ¹⁾ 1734	PA 10 ¹⁾ 1735

¹⁾ Multiple EC fans can normally be connected ²⁾ alternative electronic differential pressure/temp. controller (EDR/ETR, No. 1437/1438) or three-step speed controller (SU/SA, No. 4266/4267), s. accessories

KRW EC 355/60/30


Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		66	59	63	58	54	48	42	40
L _{WA} Intake		78	73	76	66	61	61	58	58
L _{WA} Exhaust		81	70	78	74	69	67	63	62

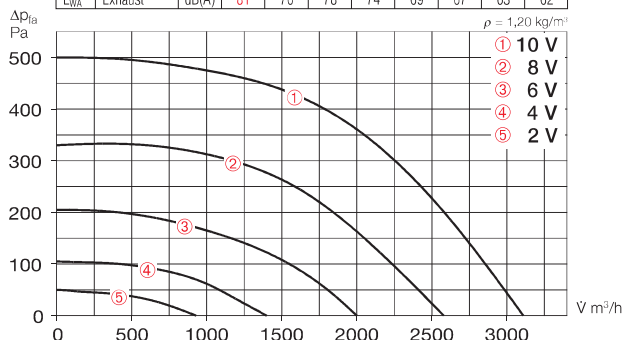

Free discharge						
Voltage V	n min ⁻¹	V m³/h	P W	I A	Lp dB(A)	SFP kW/m³/s
10	1650	3110	275	1.20	46	0.32
8	1350	2580	150	0.65	42	0.21
6	1050	2000	75	0.35	37	0.14
4	750	1400	35	0.20	28	0.09

SKRW EC 355/60/30


Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		71	58	71	55	52	49	44	39
L _{WA} Intake		78	72	75	64	58	56	52	50
L _{WA} Exhaust		84	74	83	73	72	69	65	61

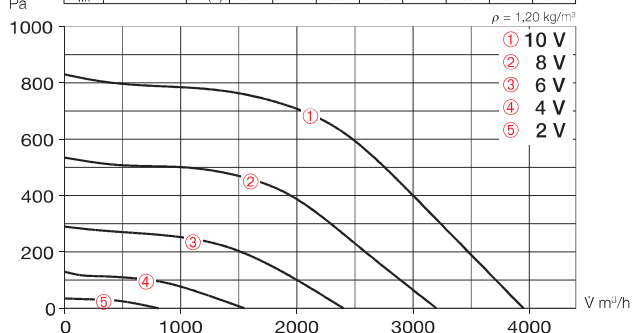

Free discharge						
Voltage V	n min ⁻¹	V m³/h	P W	I A	Lp dB(A)	SFP kW/m³/s
10	2200	3950	670	3.10	51	0.61
8	1750	3200	360	1.70	46	0.41
6	1300	2400	160	0.74	40	0.24
4	850	1550	60	0.36	32	0.14

SKRD EC 355/60/30

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout		72	61	71	61	57	53	48	42
L _{WA} Intake		80	74	76	68	62	60	56	53
L _{WA} Exhaust		86	76	84	77	76	74	69	64

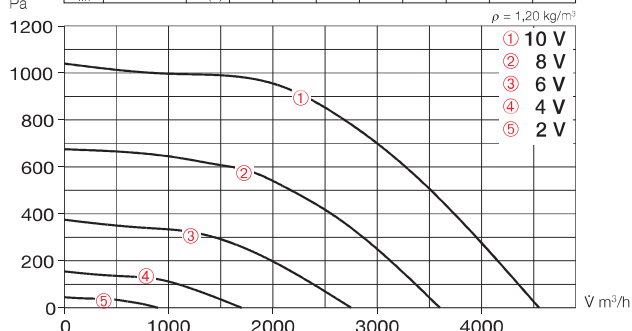

Free discharge						
Voltage V	n min ⁻¹	V m³/h	P W	I A	Lp dB(A)	SFP kW/m³/s
10	2500	4550	930	1.50	52	0.74
8	2000	3600	500	0.82	47	0.50
6	1450	2750	220	0.45	42	0.29
4	950	1700	80	0.26	33	0.17

Accessories

Gravity shutter

Type VK 60/30 Ref. no. 0877

Air stream operated louvers, light grey polymer.

External louver

Type WSG 60/30 Ref. no. 0112

Heavy duty construction made from profile anodised aluminium extrusion.

Vol. control damper for ducting

Type JVK 60/30 Ref. no. 6913

Casing with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 60/30 Ref. no. 0834

For cost effective adaption of rectangular fans into circular ducting systems with Ø 315 mm.

Flexible connectors

Type VS 60/30 Ref. no. 5697

Flexible in-duct connector with flanges on both sides.

Counterflange

Type GF 60/30 Ref. no. 6922

Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 60/30-35 No. 8730

For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 60/30-35 G4 No. 8722

Type KLF 60/30-35 F7 No. 8646

Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Electric heater battery

Type EHR-K 15/60/30-35 No. 8706

Type EHR-K 30/60/30-35 No. 8707

Heating elements enclosed in a galvanised steel casing with connecting flanges on both sides.

Temperature control system for electric heater battery

Type EHSD 16 Ref. no. 5003

Warm water heater battery

Type WHR 2/60/30-35 No. 8786


Type WHR 4/60/30-35 No. 8787

For in-duct installation.

Temperature control system for warm water heater battery

Type WHS HE¹⁾ Ref. no. 8319

¹⁾ In model WHR 4/60/30-35 the heat output is reduced to 2200 l/h.




KR EC

Suitable for polluted air.



(Fig. similar)

Dim. in mm

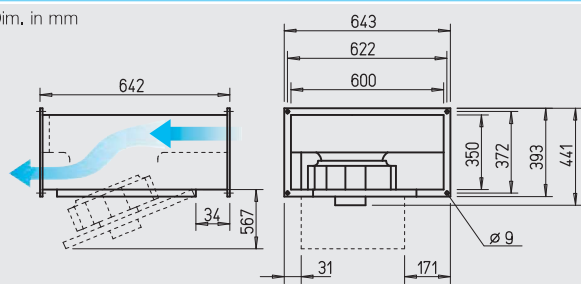

■ Features of

KR EC and SKR EC

- Highly efficient EC-motor for lowest operating costs.
- High pressure and high volume with high efficiency centrifugal fan.
- Particularly easy to service (cleaning) thanks to the swing-out motor impeller unit.
- For cleaning, easy access and therefore suitable for extraction of polluted air.
- Straight through-flow.
- Compact design, convenient installation.

■ Special features of SKR EC

- Lowest sound levels for intake and case breakout at higher power density.

■ Specification

□ Casing KR EC

Made of galvanised steel. Flanged (20 mm) on both ends for in-duct installation.

□ Casing SKR EC

As above, but with additional sound insulation with 50 mm thick mineral fibre board, inside lined with a sound deadening perforated plate.

■ Common features of KR EC and SKR EC

□ Impeller

Centrifugal, backward curved impeller made of polymer. Aerodynamically optimised, intake air flow by means of an inlet nozzle.

SKR EC – Sound insulated




Lowest sound levels for intake and case breakout at higher power density.

Use in extract and fresh air systems with specific requirements for low noise levels.



Dim. in mm

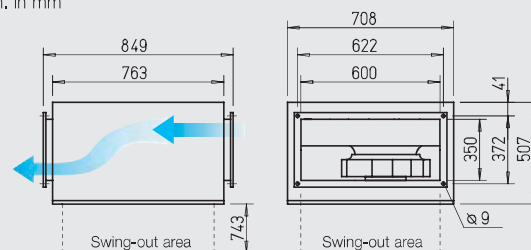

□ Motor

Energy-saving, speed controllable EC-external rotor motors with highest efficiency, protection to IP 44 (SKR EC IP 54). With ball bearings, maintenance-free and interference-free. Motor and impeller are dynamically balanced.

□ Motor protection

Integrated electronic temperature monitoring for EC-motor and electronics.

□ Speed control

Stepless speed control with potentiometer or stepless speed control with universal control system (see table). Duties at different speeds are exemplarily given in the performance curve.

□ Electrical connection

Terminal box (IP 54) fitted to flying lead.

□ Installation

Installation in any position. Allowance must be made for the motor swing out access.

■ Sound levels

Total sound power levels and the spectrum figures in dB(A) are given for:


- Sound level case breakout
 - Sound level intake
 - Sound level exhaust
- In the table below as well as underneath the performance curve you can find additionally the sound pressure level at 4 m (free field conditions).

Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Motor power	Current	Wiring diagram	max. air flow temperature	Weight net approx.	Universal control system	Speed-potentiometer flush	Speed-potentiometer surface
		m^3/h	min^{-1}	dB(A) in 4 m	kW	A	No.	$^{\circ}\text{C}$	kg	Type Ref. no.	Type Ref. no.	Type Ref. no.
Single Phase, 230 V, 50/60 Hz, EC motor, protection to IP 54												
KRW EC 400/60/35	8172	4460	2200	56	0.88	4.04	982	60	30.4	EUR EC ^{1) 2)} 1347	PU 10 ¹⁾ 1734	PA 10 ¹⁾ 1735
Sound insulated model SKR EC – 1-phase, 1~, 230 V, 50/60 Hz, EC motor, protection to IP 54												
SKRW EC 400/60/35	8177	4200	2200	51	0.84	3.92	982	60	46.0	EUR EC ^{1) 2)} 1347	PU 10 ¹⁾ 1734	PA 10 ¹⁾ 1735
Sound insulated model SKR EC – 3-phase, 3~, 400 V, 50/60 Hz, EC motor, protection to IP 54												
SKRD EC 400/60/35	8297	5000	2500	51	1.17	1.81	1005	60	46.0	EUR EC ^{1) 2)} 1347	PU 10 ¹⁾ 1734	PA 10 ¹⁾ 1735

¹⁾ Multiple EC fans can normally be connected ²⁾ alternative electronic differential pressure/temp. controller (EDR/ETR, No. 1437/1438) or three-step speed controller (SU/SA, No. 4266/4267), s. accessories

KRW EC 400/60/35


Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout	dB(A)	76	57	76	62	61	57	50	45
L _{WA} Intake	dB(A)	86	72	85	72	71	69	66	61
L _{WA} Exhaust	dB(A)	90	74	88	81	80	77	72	66

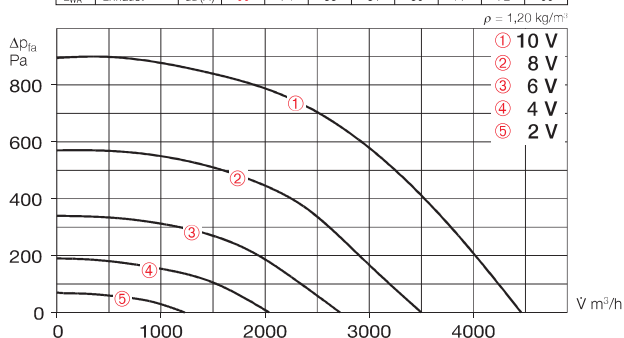

Free discharge						
Voltage V	n min ⁻¹	V m³/h	P W	I A	Lp dB(A)	SFP kW/m³/s
10	2200	4460	635	3.00	56	0.51
8	1750	3500	340	1.60	50	0.35
6	1350	2720	160	0.73	43	0.21
4	1000	2040	75	0.37	37	0.13

SKRW EC 400/60/35


Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout	dB(A)	71	55	70	53	49	49	46	44
L _{WA} Intake	dB(A)	76	69	74	63	56	53	50	48
L _{WA} Exhaust	dB(A)	83	71	82	70	71	69	63	60

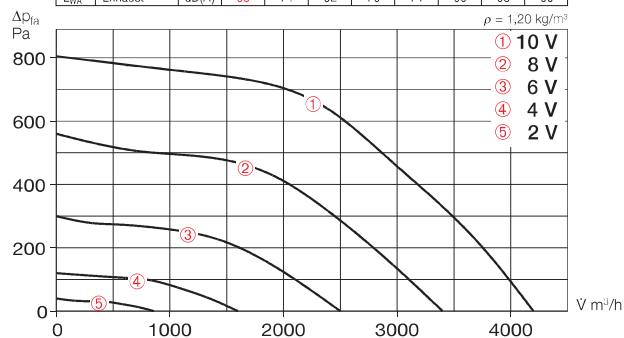

Free discharge						
Voltage V	n min ⁻¹	V m³/h	P W	I A	Lp dB(A)	SFP kW/m³/s
10	2200	4200	600	2.90	51	0.51
8	1800	3400	350	1.70	46	0.37
6	1300	2500	150	0.71	40	0.22
4	850	1600	60	0.34	33	0.14

SKRD EC 400/60/35

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k
L _{WA} Case breakout	dB(A)	71	59	70	62	53	48	44	41
L _{WA} Intake	dB(A)	78	73	75	69	63	58	55	52
L _{WA} Exhaust	dB(A)	86	75	84	76	77	73	68	66

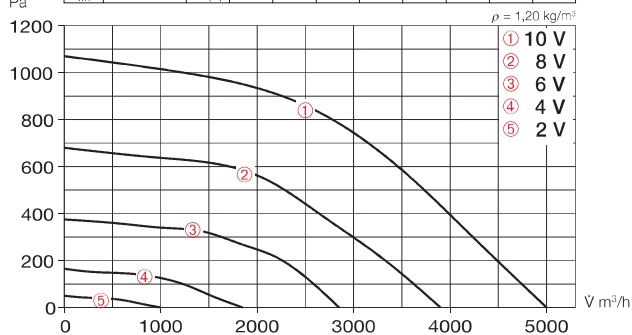

Free discharge						
Voltage V	n min ⁻¹	V m³/h	P W	I A	Lp dB(A)	SFP kW/m³/s
10	2500	5000	830	1.30	51	0.60
8	2000	3900	450	0.77	46	0.42
6	1450	2850	200	0.43	40	0.25
4	950	1850	70	0.25	33	0.14

Accessories

Gravity shutter

Type VK 60/35 Ref. no. 0878

Air stream operated louvres, light grey polymer.

External louvre

Type WSG 60/35 Ref. no. 0113

Heavy duty construction made from profile anodised aluminium extrusion.

Vol. control damper for ducting

Type JVK 60/35 Ref. no. 6914

Casing with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 60/35 Ref. no. 0835

For cost effective adaption of rectangular fans into circular ducting systems with Ø 355 mm.

Flexible connectors

Type VS 60/35 Ref. no. 5698

Flexible in-duct connector with flanges on both sides.

Counterflange

Type GF 60/35 Ref. no. 6923

Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 60/30-35 No. 8730

For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 60/30-35 G4 No. 8722

Type KLF 60/30-35 F7 No. 8646

Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Electric heater battery

Type EHR-K 15/60/30-35 No. 8706

Type EHR-K 30/60/30-35 No. 8707

Heating elements enclosed in a galvanised steel casing with connecting flanges on both sides.

Temperature control system for electric heater battery

Type EHSD 16 Ref. no. 5003

Warm water heater battery

Type WHR 2/60/30-35 No. 8786


Type WHR 4/60/30-35 No. 8787

For in-duct installation.

Temperature control system for warm water heater battery

Type WHS HE¹⁾ Ref. no. 8319

¹⁾ In model WHR 4/60/30-35 the heat output is reduced to 2200 l/h.




KR EC

Suitable for polluted air.



(Fig. similar)

Dim, in mm

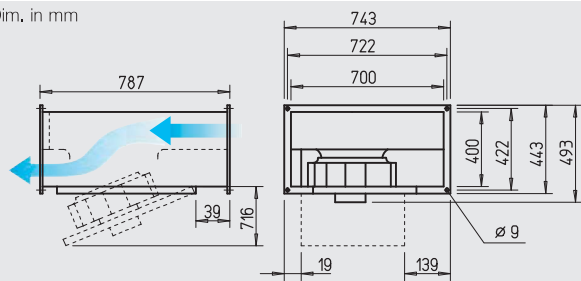

Features of

KR EC and SKR EC

- ☐ Highly efficient EC-motor for lowest operating costs.
- ☐ High pressure and high volume with high efficiency centrifugal fan.
- ☐ Particularly easy to service (cleaning) thanks to the swing-out motor impeller unit.
- ☐ For cleaning, easy access and therefore suitable for extraction of polluted air.
- ☐ Straight through-flow.
- ☐ Compact design, convenient installation.

Special features of SKR EC

- ☐ Lowest sound levels for intake and case breakout at higher power density.

Specification

Casing KR EC

Made of galvanised steel. Flanged (20 mm) on both ends for in-duct installation.

Casing SKR EC

As above, but with additional sound insulation with 50 mm thick mineral fibre board, inside lined with a sound deadening perforated plate.

Common features of KR EC and SKR EC

Impeller

Centrifugal, backward curved impeller made of polymer. Aerodynamically optimised, intake air flow by means of an inlet nozzle.

SKR EC – Sound insulated




Lowest sound levels for intake and case breakout at higher power density.

Use in extract and fresh air systems with specific requirements for low noise levels.



Dim, in mm

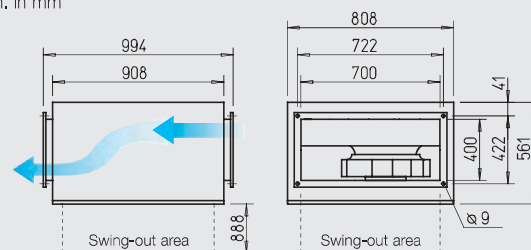

Motor

Energy-saving, speed controllable EC-external rotor motors with highest efficiency, protection to IP 44 (SKR EC IP 54). With ball bearings, maintenance-free and interference-free. Motor and impeller are dynamically balanced.

Motor protection

Integrated electronic temperature monitoring for EC-motor and electronics.

Speed control

Stepless speed control with potentiometer or stepless speed control with universal control system (see table). Duties at different speeds are exemplarily given in the performance curve.

Electrical connection

Terminal box (IP 54) fitted to flying lead.

Installation

Installation in any position. Allowance must be made for the motor swing out access.

Sound levels

Total sound power levels and the spectrum figures in dB(A) are given for:


- Sound level case breakout
 - Sound level intake
 - Sound level exhaust
- In the table below as well as underneath the performance curve you can find additionally the sound pressure level at 4 m (free field conditions).

Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Motor power	Current	Wiring diagram	max. air flow temperature	Weight net approx.	Universal control system		Speed-potentiometer flush		Speed-potentiometer surface	
		V m³/h	min ⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Single Phase, 230 V, 50/60 Hz, EC motor, protection to IP 54															
KRW EC 450/70/40	6127	5450	1420	46	0.72	3.29	982	60	40.0	EUR EC ^{1) 2)}	1347	PU 10 ¹⁾	1734	PA 10 ¹⁾	1735
Three Phase, 400 V, 50/60 Hz, EC motor, protection to IP 54															
KRD EC 450/70/40	8173	7480	2300	54	1.50	2.30	1005	60	40.0	EUR EC ^{1) 2)}	1347	PU 10 ¹⁾	1734	PA 10 ¹⁾	1735
Sound insulated model SKR EC – 1-phase, 230 V, 50/60 Hz, EC motor, protection to IP 54															
SKRW EC 450/70/40 ³⁾	6129	5420	1410	45	0.71	3.24	982	60	60.0	EUR EC ^{1) 2)}	1347	PU 10 ¹⁾	1734	PA 10 ¹⁾	1735
Sound insulated model SKR EC – 3-phase, 400 V, 50/60 Hz, EC motor, protection to IP 54															
SKRD EC 450/70/40 A	8178	7500	1800	51	1.44	2.24	1005	60	60.0	EUR EC ^{1) 2)}	1347	PU 10 ¹⁾	1734	PA 10 ¹⁾	1735


¹⁾ Multiple EC fans can normally be connected ²⁾ alternative electronic differential pressure/temp. controller (EDR/ETR, No. 1437/1438) or three-step speed controller (SU/SA, No. 4266/4267), s. accessories

³⁾ Characteristic curve diagram on www.HeliosSelect.de


KRW EC 450/70/40

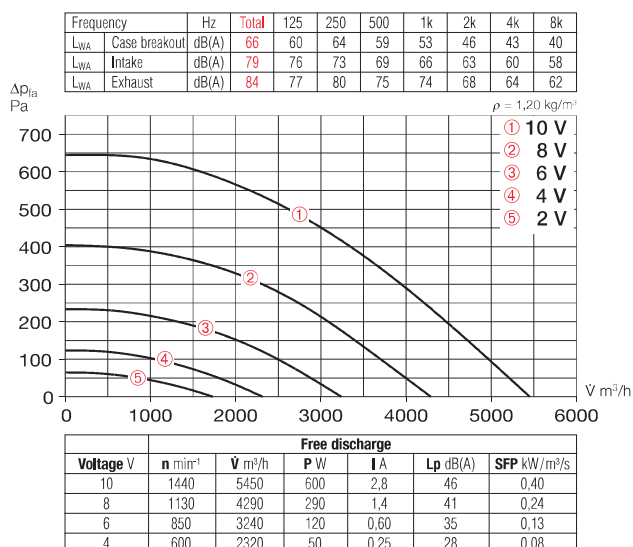

KRD EC 450/70/40

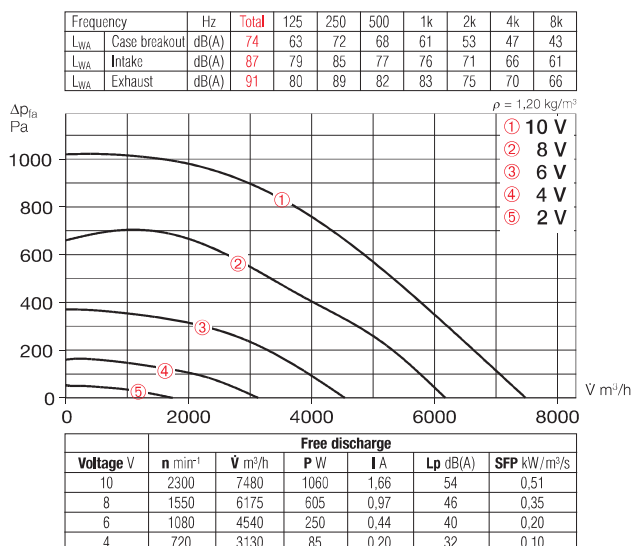

SKRD EC 450/70/40 A

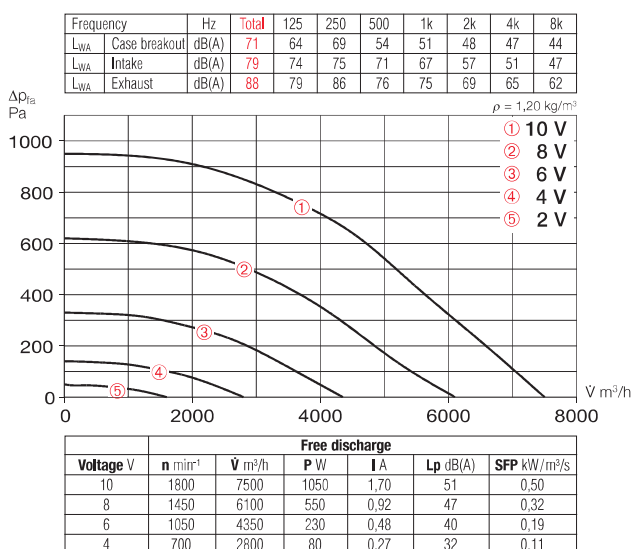

Accessories

Gravity shutter

Type VK 70/40 Ref. no. 0879

Air stream operated louvers, light grey polymer.

External louver

Type WSG 70/40 Ref. no. 0114

Heavy duty construction made from profile anodised aluminium extrusion.

Vol. control damper for ducting

Type JVK 70/40 Ref. no. 0895

Casing with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 70/40 Ref. no. 0840

For cost effective adaption of rectangular fans into circular ducting systems with Ø 400 mm.

Flexible connectors

Type VS 70/40 Ref. no. 5699

Flexible in-duct connector with flanges on both sides.

Counterflange

Type GF 70/40 Ref. no. 6924

Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 70/40 Ref. no. 8731

For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 70/40 G4 No. 8723

Type KLF 70/40 F7 No. 8647

Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Warm water heater battery

Type WHR 2/70/40 No. 8788


Type WHR 4/70/40 No. 8789

For in-duct installation.

Temperature control system for warm water heater battery

Type WHS HE¹⁾ Ref. no. 8319

¹⁾ In model WHR 4/70/40 the heat output is reduced to 2200 l/h.



Accessory details Page

Shutters, grilles and louvers	420, 487 on
Filters, heater batteries and attenuators	421 on
Temperature control systems for heater batteries	427, 432 on
Universal control system, electronic controller, speed-potentiometer	539 on




KR EC

Suitable for polluted air.



(Fig. similar)

Dim. in mm

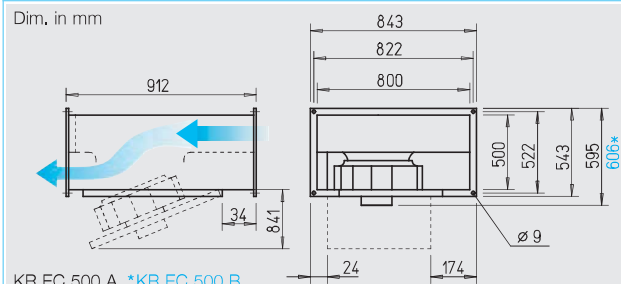

KR EC 500 A, *KR EC 500 B

Features of

KR EC and SKR EC

- ☐ Highly efficient EC-motor for lowest operating costs.
- ☐ High pressure and high volume with high efficiency centrifugal fan.
- ☐ Particularly easy to service (cleaning) thanks to the swing-out motor impeller unit.
- ☐ For cleaning, easy access and therefore suitable for extraction of polluted air.
- ☐ Straight through-flow.
- ☐ Compact design, convenient installation.

Special features of SKR EC

- ☐ Lowest sound levels for intake and case breakout at higher power density.

Specification

Casing KR EC

Made of galvanised steel. Flanged (20 mm) on both ends for in-duct installation.

Casing SKR EC

As above, but with additional sound insulation with 50 mm thick mineral fibre board, inside lined with a sound deadening perforated plate.

Common features of KR EC and SKR EC

Impeller

Centrifugal, backward curved impeller made of polymer. Aerodynamically optimised, intake air flow by means of an inlet nozzle.


SKR EC – Sound insulated

Lowest sound levels for intake and case breakout at higher power density.

Use in extract and fresh air systems with specific requirements for low noise levels.



Dim. in mm

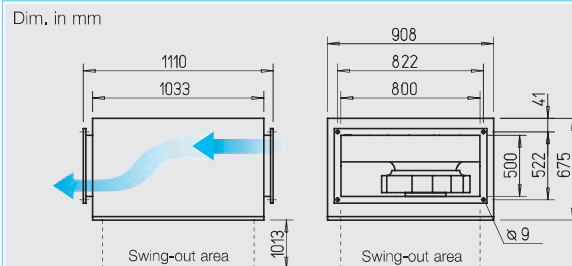

Motor

Energy-saving, speed controllable EC-external rotor motors with highest efficiency, protection to IP 44 (SKR EC IP 54). With ball bearings, maintenance-free and interference-free. Motor and impeller are dynamically balanced.

Motor protection

Integrated electronic temperature monitoring for EC-motor and electronics.

Speed control

Stepless speed control with potentiometer or stepless speed control with universal control system (see table). Duties at different speeds are exemplarily given in the performance curve.

Electrical connection

Terminal box (IP 54) fitted to flying lead.

Installation

Installation in any position. Allowance must be made for the motor swing out access.

Sound levels

Total sound power levels and the spectrum figures in dB(A) are given for:


- Sound level case breakout
 - Sound level intake
 - Sound level exhaust
- In the table below as well as underneath the performance curve you can find additionally the sound pressure level at 4 m (free field conditions).

Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Motor power	Current	Wiring diagram	max. air flow temperature	Weight net approx.	Universal control system	Speed-potentiometer, flush	Speed-potentiometer, surface
		m^3/h	min^{-1}	dB(A) in 4 m	kW	A	No.	$^{\circ}\text{C}$	kg	Type Ref. no.	Type Ref. no.	Type Ref. no.
Three phase, 400 V, 50/60 Hz, EC motor, protection to IP 54												
KRD EC 500/80/50 A	8174	8810	1400	51	1.26	1.96	1005	60	55.6	EUR EC ^{1) 2)} 1347	PU 10 ¹⁾ 1734	PA 10 ¹⁾ 1735
KRD EC 500/80/50 B ³⁾	6128	10400	1800	60	2.57	3.92	1005	60	55.0	EUR EC ^{1) 2)} 1347	PU 10 ¹⁾ 1734	PA 10 ¹⁾ 1735
Sound insulated model SKR EC – 3-phase, 400 V, 50/60 Hz, EC motor, protection to IP 54												
SKRD EC 500/80/50 A	8299	8600	1400	48	1.20	1.87	1005	60	67.5	EUR EC ^{1) 2)} 1347	PU 10 ¹⁾ 1734	PA 10 ¹⁾ 1735
SKRD EC 500/80/50 B	8179	10650	1800	55	2.42	3.68	1005	60	79.5	EUR EC ^{1) 2)} 1347	PU 10 ¹⁾ 1734	PA 10 ¹⁾ 1735


¹⁾ Multiple EC fans can normally be connected ²⁾ alternative electronic differential pressure/temp. controller (EDR/ETR, No. 1437/1438) or three-step speed controller (SU/SA, No. 4266/4267), s. accessories

³⁾ Characteristic curve diagram on www.HeliosSelect.de


KRD EC 500/80/50 A

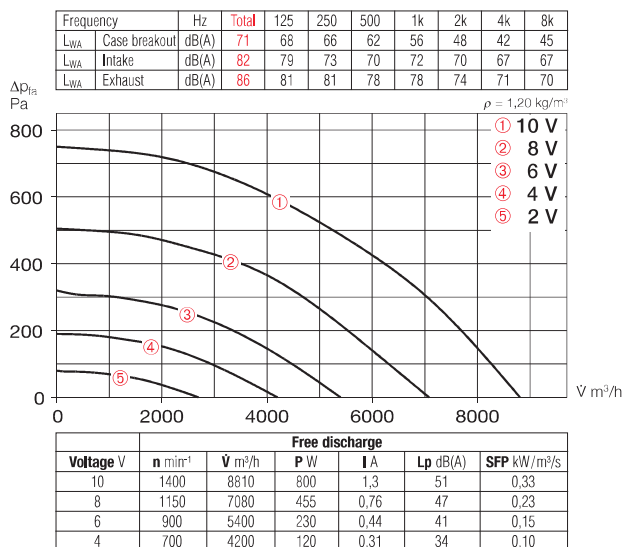

SKRD EC 500/80/50 A

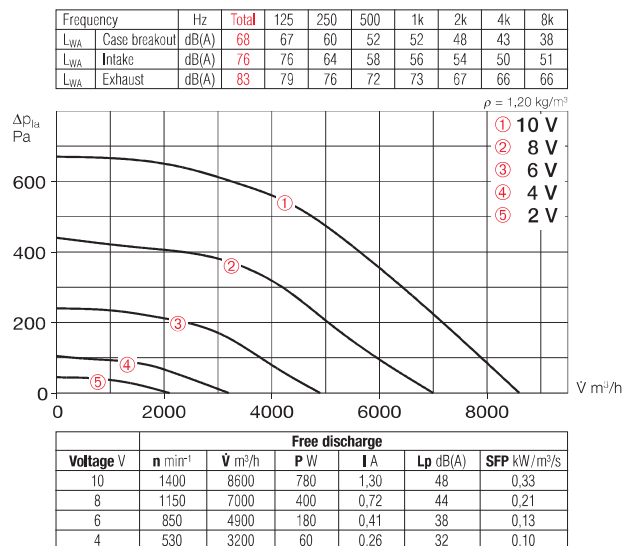

SKRD EC 500/80/50 B

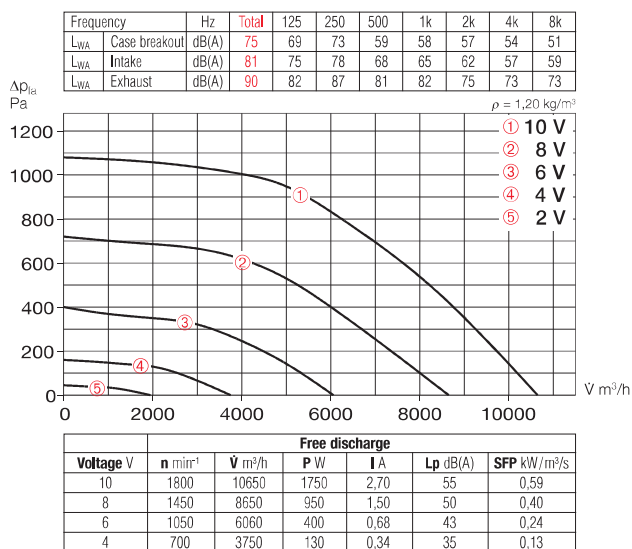

Accessories

Gravity shutter

Type VK 80/50 Ref. no. 0880

Air stream operated louvers, light grey polymer.

External louver

Type WSG 80/50 Ref. no. 0115

Heavy duty construction made from profile anodised aluminium extrusion.

Vol. control damper for ducting

Type JVK 80/50 Ref. no. 6916

Casing with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 80/50 Ref. no. 0842

For cost effective adaption of rectangular fans into circular ducting systems with Ø 500 mm.

Flexible connectors

Type VS 80/50 Ref. no. 5700

Flexible in-duct connector with flanges on both sides.

Counterflange

Type GF 80/50 Ref. no. 6925

Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 80/50 Ref. no. 8732

For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 80/50 G4 No. 8670

Type KLF 80/50 F7 No. 8654


Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Warm water heater battery

Type WHR 2/80/50 No. 8795

Type WHR 4/80/50 No. 8796

For in-duct installation.



Accessory details Page

Shutters, grilles and louvers	420, 487 on
Filters, heater batteries and attenuators	421 on
Universal control system, electronic controller, speed-potentiometer	539 on




KR EC

Suitable for polluted air.



(Fig. similar)

Dim, in mm

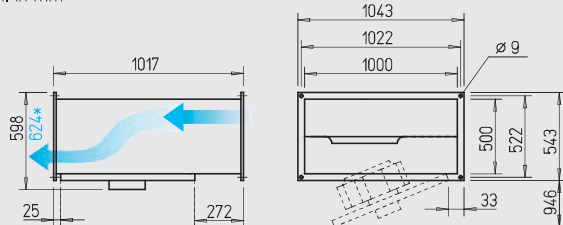

KR EC 560 A, *KR EC 560 B

Features of

KR EC and SKR EC

- ☐ Highly efficient EC-motor for lowest operating costs.
- ☐ High pressure and high volume with high efficiency centrifugal fan.
- ☐ Particularly easy to service (cleaning) thanks to the swing-out motor impeller unit.
- ☐ For cleaning, easy access and therefore suitable for extraction of polluted air.
- ☐ Straight through-flow.
- ☐ Compact design, convenient installation.

Special features of SKR EC

- ☐ Lowest sound levels for intake and case breakout at higher power density.

Specification

Casing KR EC

Made of galvanised steel. Flanged (20 mm) on both ends for in-duct installation.

Casing SKR EC

As above, but with additional sound insulation with 50 mm thick mineral fibre board, inside lined with a sound deadening perforated plate.

Common features of KR EC and SKR EC

Impeller

Centrifugal, backward curved impeller made of polymer. Aerodynamically optimised, intake air flow by means of an inlet nozzle.

SKR EC – Sound insulated




Lowest sound levels for intake and case breakout at higher power density.

Use in extract and fresh air systems with specific requirements for low noise levels.



Dim, in mm

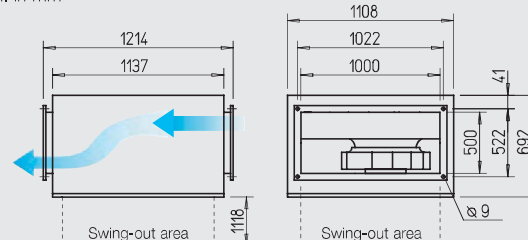

Motor

Energy-saving, speed controllable EC-external rotor motors with highest efficiency, protection to IP 44 (SKR EC IP 54). With ball bearings, maintenance-free and interference-free. Motor and impeller are dynamically balanced.

Motor protection

Integrated electronic temperature monitoring for EC-motor and electronics.

Speed control

Stepless speed control with potentiometer or stepless speed control with universal control system (see table). Duties at different speeds are exemplarily given in the performance curve.

Electrical connection

Terminal box (IP 54) fitted to flying lead.

Installation

Installation in any position. Allowance must be made for the motor swing out access.

Sound levels

Total sound power levels and the spectrum figures in dB(A) are given for:


- Sound level case breakout
 - Sound level intake
 - Sound level exhaust
- In the table below as well as underneath the performance curve you can find additionally the sound pressure level at 4 m (free field conditions).

Type	Ref. no.	Air flow volume (FID)	Nominal R.P.M.	Sound press. case breakout	Motor power	Current	Wiring diagram	max. air flow temperature	Weight net approx.	Universal control system	Speed-potentiometer				
		∇ m³/h	min ⁻¹	dB(A) in 4 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Three phase, 400 V, 50/60 Hz, EC motor, protection to IP 54															
KRD EC 560/100/50 A	8167	11270	1230	54	1.57	2.45	1005	60	70.8	EUR EC ^{1) 2)}	1347	PU 10 ¹⁾	1734	PA 10 ¹⁾	1735
KRD EC 560/100/50 B	8175	14410	1630	60	3.45	5.20	1005	60	83.0	EUR EC ^{1) 2)}	1347	PU 10 ¹⁾	1734	PA 10 ¹⁾	1735
Sound insulated model SKR EC – 3-phase, 400 V, 50/60 Hz, EC motor, protection to IP 54															
SKRD EC 560/100/50 A ³⁾	6130	10070	1230	48	1.48	2.30	1005	60	98.0	EUR EC ^{1) 2)}	1347	PU 10 ¹⁾	1734	PA 10 ¹⁾	1735
SKRD EC 560/100/50 B	8180	13700	1630	56	3.26	4.98	1005	60	100.0	EUR EC ^{1) 2)}	1347	PU 10 ¹⁾	1734	PA 10 ¹⁾	1735


¹⁾ Multiple EC fans can normally be connected ²⁾ alternative electronic differential pressure/temp. controller (EDR/ETR, No. 1437/1438) or three-step speed controller (SU/SA, No. 4266/4267), s. accessories

³⁾ Characteristic curve diagram on www.HeliosSelect.de


KRD EC 560/100/50 A

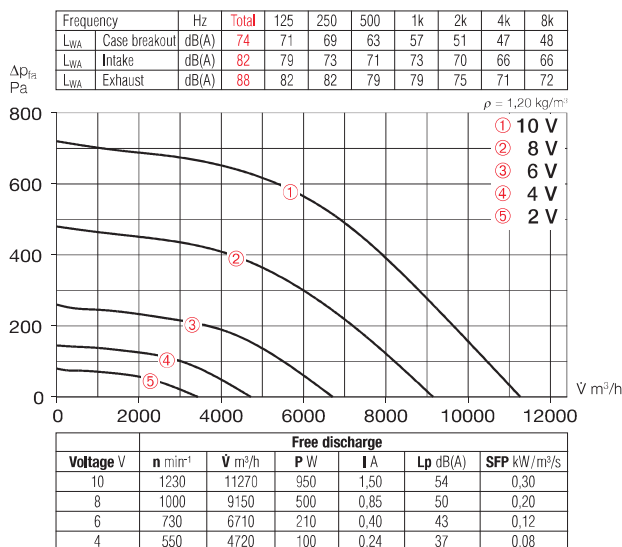

KRD EC 560/100/50 B

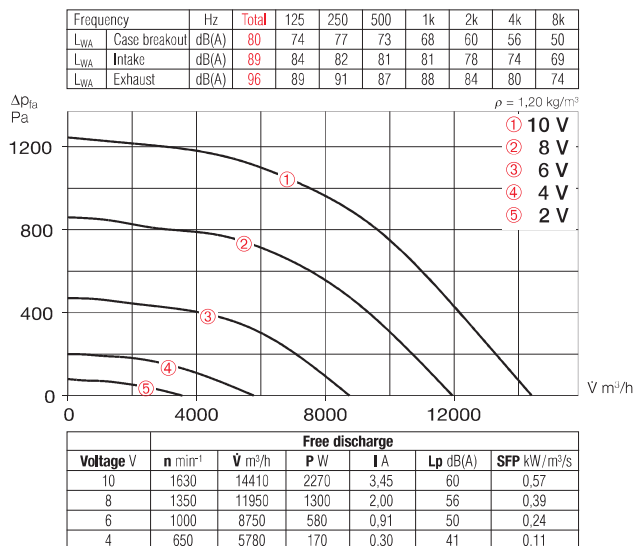

SKRD EC 560/100/50 B

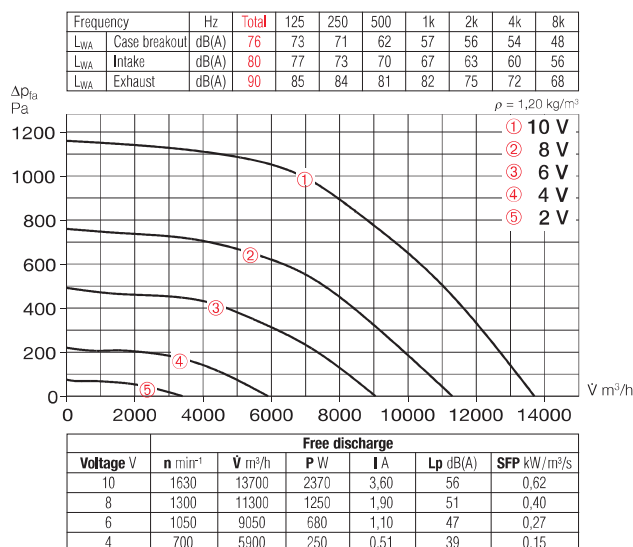

Accessories

Gravity shutter

Type VK 100/50 Ref. no. 0881

Air stream operated louvers, light grey polymer.

External louver

Type WSG 100/50 Ref. no. 0116

Heavy duty construction made from profile anodised aluminium extrusion.

Vol. control damper for ducting

Type JVK 100/50 Ref. no. 6917

Casing with flanges on both sides. The control mechanism is outside the airstream. For electrical drive, see STM, accessory.

Circular spigot

Type FSK 100/50 Ref. no. 0843

For cost effective adaption of rectangular fans into circular ducting systems with Ø 500 mm.

Flexible connectors

Type VS 100/50 Ref. no. 5701

Flexible in-duct connector with flanges on both sides.

Counterflange

Type GF 100/50 Ref. no. 6926

Flange frames made of galvanised steel for connection to ducting.

Rectangular attenuator

Type KSD 100/50 Ref. no. 8733

For in-duct installation on intake or exhaust side.

Air-duct filter

Type KLF 100/50 G4 No. 8671

Type KLF 100/50 F7 No. 8655


Bag filter with a large cross section area. Galvanised steel casing with flanges on both sides.

Warm water heater battery

Type WHR 2/100/50 No. 8797

Type WHR 4/100/50 No. 8798

For in-duct installation.



Accessory details Page

Shutters, grilles and louvers	420, 487 on
Filters, heater batteries and attenuators	421 on
Universal control system, electronic controller, speed-potentiometer	539 on

