

WX6, WX9 & WX12


Commercial wall fans with corrugated plastic wall liner

WX commercial duty wall fans are designed for pubs, restaurants, offices, kitchens, factories, schools and shops, and are suitable for single, cavity brick and timber frame walls. The low profile white fascia is styled to blend in cleanly with commercial surroundings, while on the WX9 and WX12 units a positive plug and socket assembly provides a means of isolation. All WX models come complete with a wall-mounting kit which includes a corrugated plastic wall liner.



Key Features

- Silent electro-thermal shutter
- Trickle ventilation facility
- Safety finger guard
- Plastic telescopic wall liner supplied
- Max wall thickness - 275 - 375mm
- 2 year UK manufacturer warranty

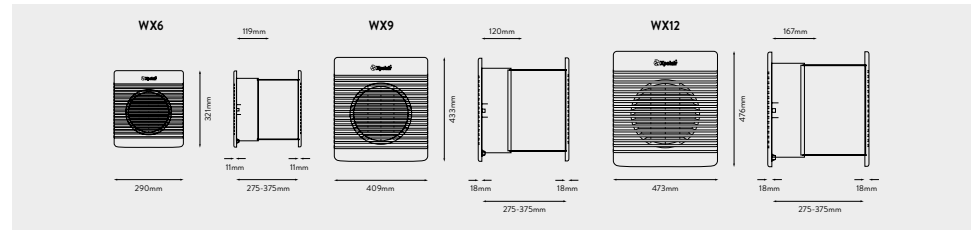

Product Selector		Standard	Timer	6" Impeller	9" Impeller	12" Impeller	Reversible Intake/Extract
Model							
WX6	90822AW	✓		✓			
WX9	89996AW	✓			✓		✓
WX12	90011AW	✓				✓	✓

Product Selector		Integral Adjustable Run-on Timer (2 - 20 mins)	Extract Only	Selectable Intake, Extract or Controller Operation	Speeds (2 speed when used with an FR22/30 controller)	Extract Performance (m ³ /h) high/low	Extract Performance (l/s) high/low
Model							
WX6	90822AW		✓		1	246	57
WX9	89996AW			✓	2	600/693	166/192
WX12	90011AW			✓	2	1162/1715	322/476

Product Selector		Intake Performance (m ³ /h) high/low	Intake Performance (l/s) high/low	Sound Pressure Level (dBA@3m) high/low	Electrical Power Rating (W)	Hole Diameter (w x h mm)	Weight (kg)
Model							
WX6	90822AW			39	34	245 x 268	2.9
WX9	89996AW	418/459	116/127	47/50	41	345 x 375	4.7
WX12	90011AW	815/969	226/269	48/54	85	434 x 434	8.3

XID


Centrifugal metal inline fans

The XID inline range is manufactured in zinc-coated, corrosion-resistant sheet metal with 30mm long spigot connections for ease of connection to ductwork. These practical, reliable fans are ideal for ducted applications in shops, schools, factories, offices, pubs, hotels, restaurants and kitchens, and are available in 100 - 315mm duct size diameters to suit any application. The fan unit is speed controllable to offer flexibility and individual control, and are supplied with a universal mounting bracket for mounting at any angle. The compact and robust zinc steel construction is Class F insulation.



Key Features

- AC motor
- Compatible with XIC1 inline fan controller, sold separately
- 2 universal mounting brackets supplied
- IP rating - IPX4
- 2 year UK manufacturer warranty

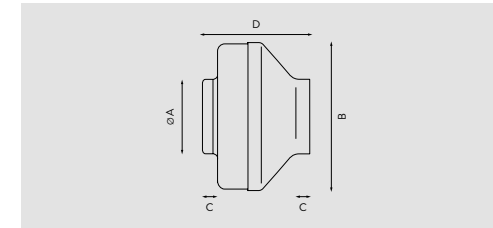

Dimensions				
Model	ØA	B	C	D
XID100	97	320	30	240
XID125	123	320	30	240
XID150	147	360	30	250
XID200	197	404	35	250
XID250	247	404	35	260
XID315	312	444	40	260

Product Selector		Spigot Diameter (mm)	Extract Performance (m ³ /s)								Sound Pressure Level (dBA@3m)	Max. Electrical Power Rating (W)	Weight (kg)
Model			0Pa	100Pa	200Pa	300Pa	400Pa	500Pa	600Pa	700Pa			
XID100	90101AA	Metal inline fan (Ø100mm duct)	0.08	0.06	0.04	0.01					25	85	2.5
XID125	90102AA	Metal inline fan (Ø125mm duct)	0.11	0.09	0.06	0.03					26	85	2.5
XID150	90103AA	Metal inline fan (Ø150mm duct)	0.17	0.12	0.07	0.02					26	99	3.7
XID200	90104AA	Metal inline fan (Ø200mm duct)	0.29	0.23	0.17	0.12	0.08	0.02			29	157	5
XID250	90208AA	Metal inline fan (Ø250mm duct)	0.34	0.29	0.24	0.17	0.11	0.04			32	194	5.6
XID315	90106AA	Metal inline fan (Ø315mm duct)	0.46	0.41	0.35	0.28	0.22	0.16	0.09	0.03	36	244	6.5