

KVR 7040 EC 30


131365

- Backward curved radial impeller
- Removable fan unit
- Housing made of galvanized sheet steel
- High efficiency EC motor, steplessly controllable
- Conveyed medium temperature up to 50 °C in continuous operation



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

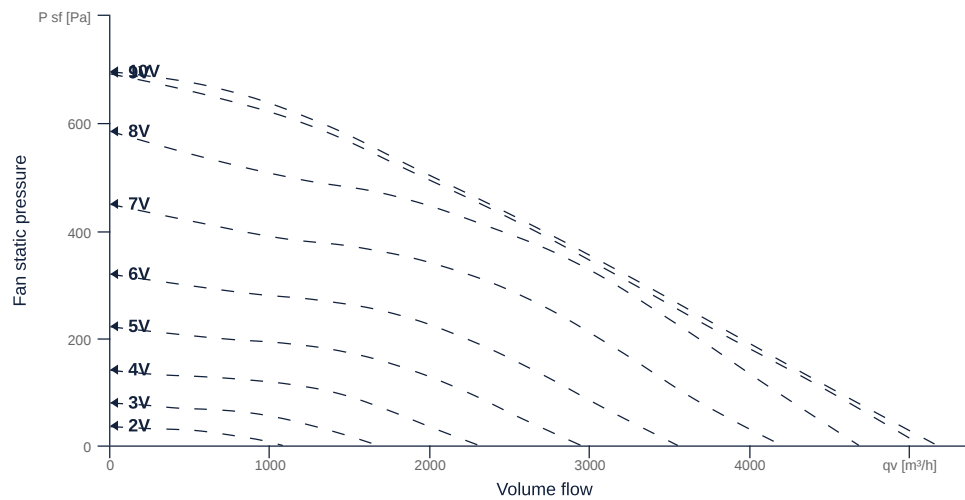

to the product detail page

KVR 7040 EC 30

131365

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	700x400		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	33	kg	m
Nominal air flow rate, nominal point m ³ /h	2628	m ³ /h	q _{v,nom}
Nominal external pressure, static	411.5	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	0.73	m ³ /s	q _{v,nom}
Actual electrical input power, nominal point	0.51	kW	P _{e,nom}
Face velocity, nominal point	2.6	m/s	v _{nom}
Nominal external pressure, static	411.5	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	64.2	%	η _{es,SUP}
Enclosure sound level, nominal point	73	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



KVR 7040 EC 30

131365

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	510	510	W	P _{ed, max}
Max. operating current (device)	2.35	2.35	A	I _{ed, max}
Max. speed	1510	1510	1/min	n _{max}
Max. stat. efficiency	55.7	55.7	%	η _{es}
Max. fan efficiency	56.3	56.3	%	η _e
Max. flowrate	5170	5170	m ³ /h	Q _{v, max}
Max. stat pressure	690	690	Pa	p _{st, max}
Max. medium temperature	50	50	°C	T _{m, max}
Max. environment temperature	50	50	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}
Min. voltage	230	230	V	U _{min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP55		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrSUP _{motor}
Rated voltage	230		V	U _{rated, f1}
Rated current	2.2		A	I _{rated, f1}
Shaft power	500		W	P _{out, f1}
Speed	1260		1/min	n _{f1}
Efficiency	61		%	η _{m, f1}
Min. temperature	-25		°C	T _{motor, min}
UL-Certification motor		UL recognized		ULcert

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}




to the product detail page

KVR 7040 EC 30

131365


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

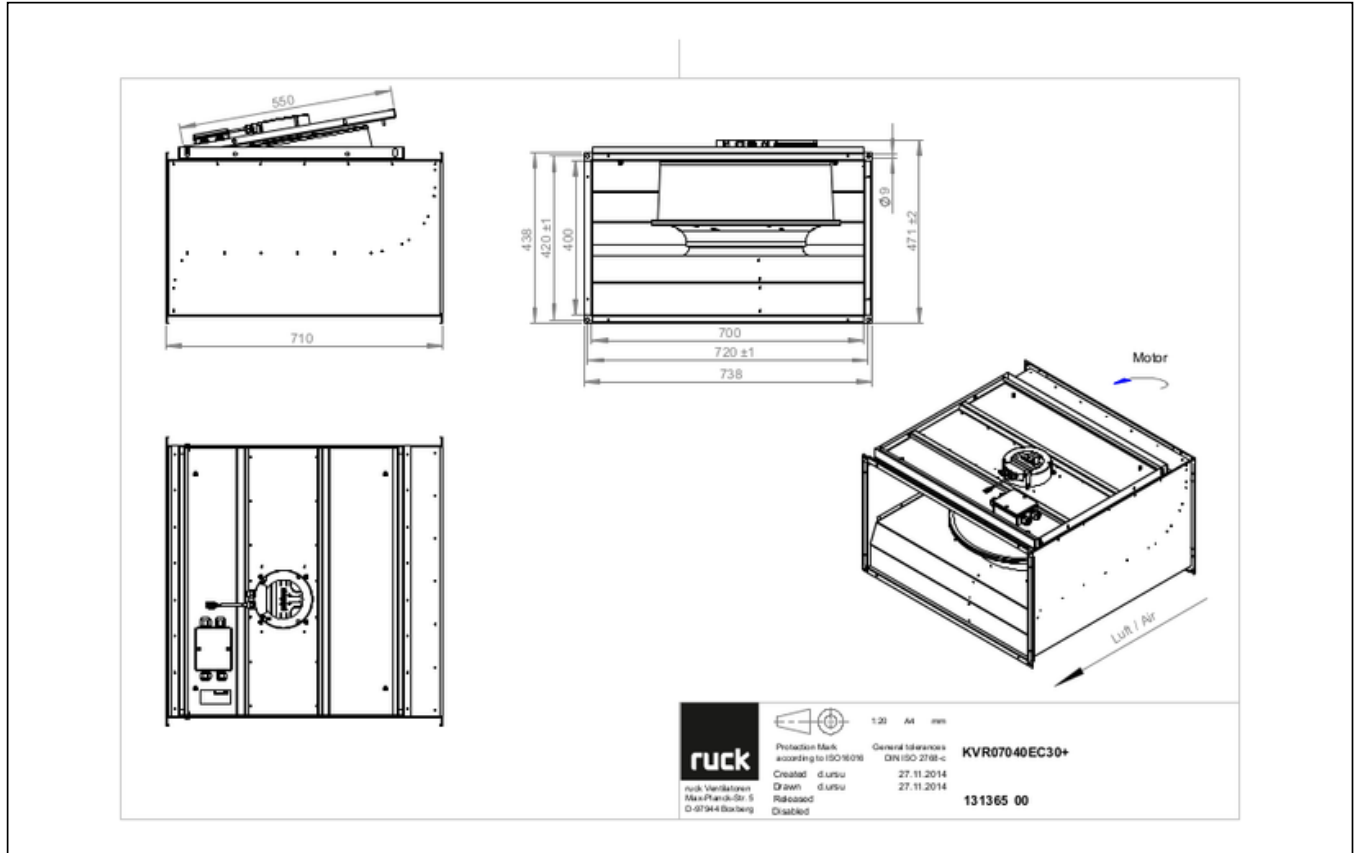

to the product detail page


KVR 7040 EC 30

131365

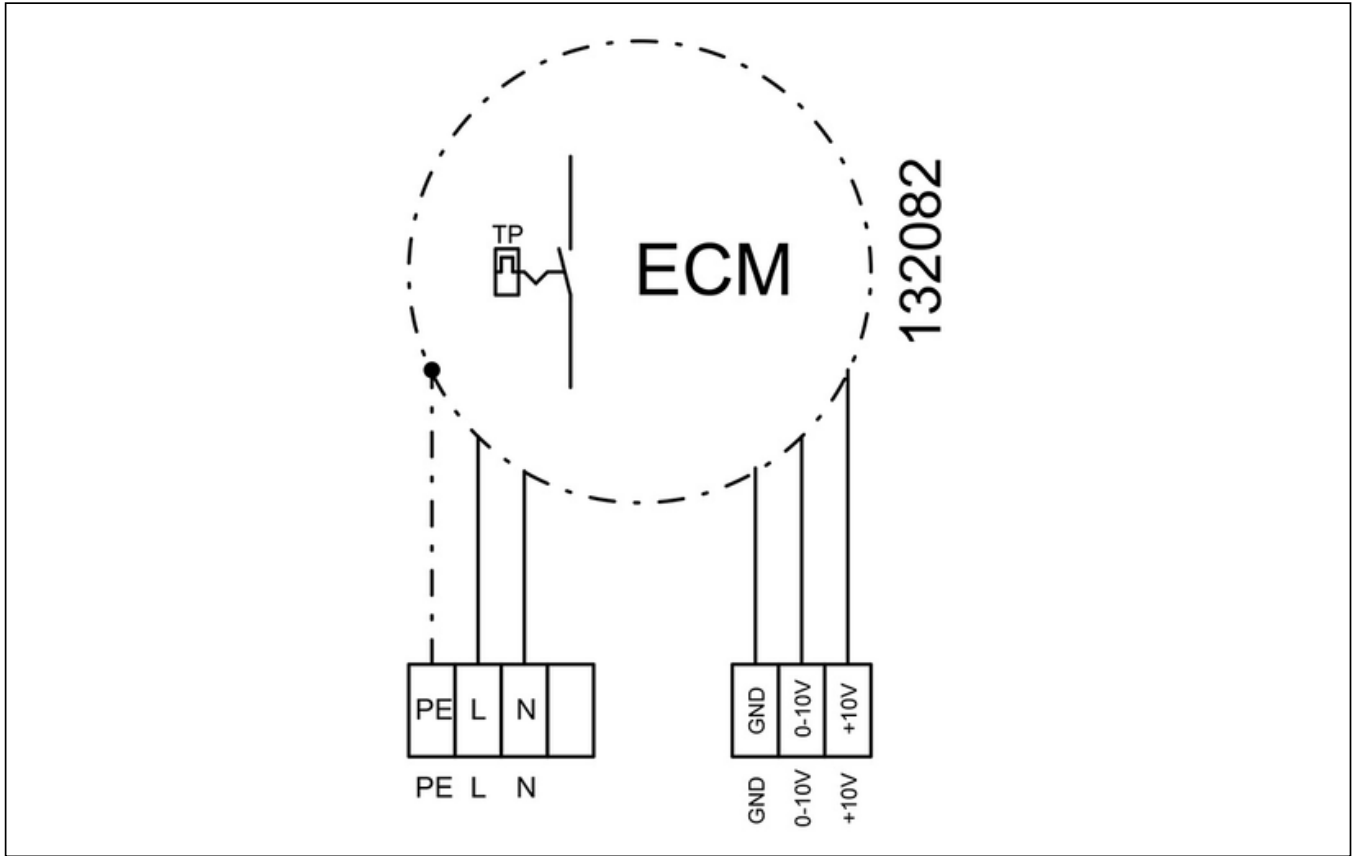


KVR 7040 EC 30

131365

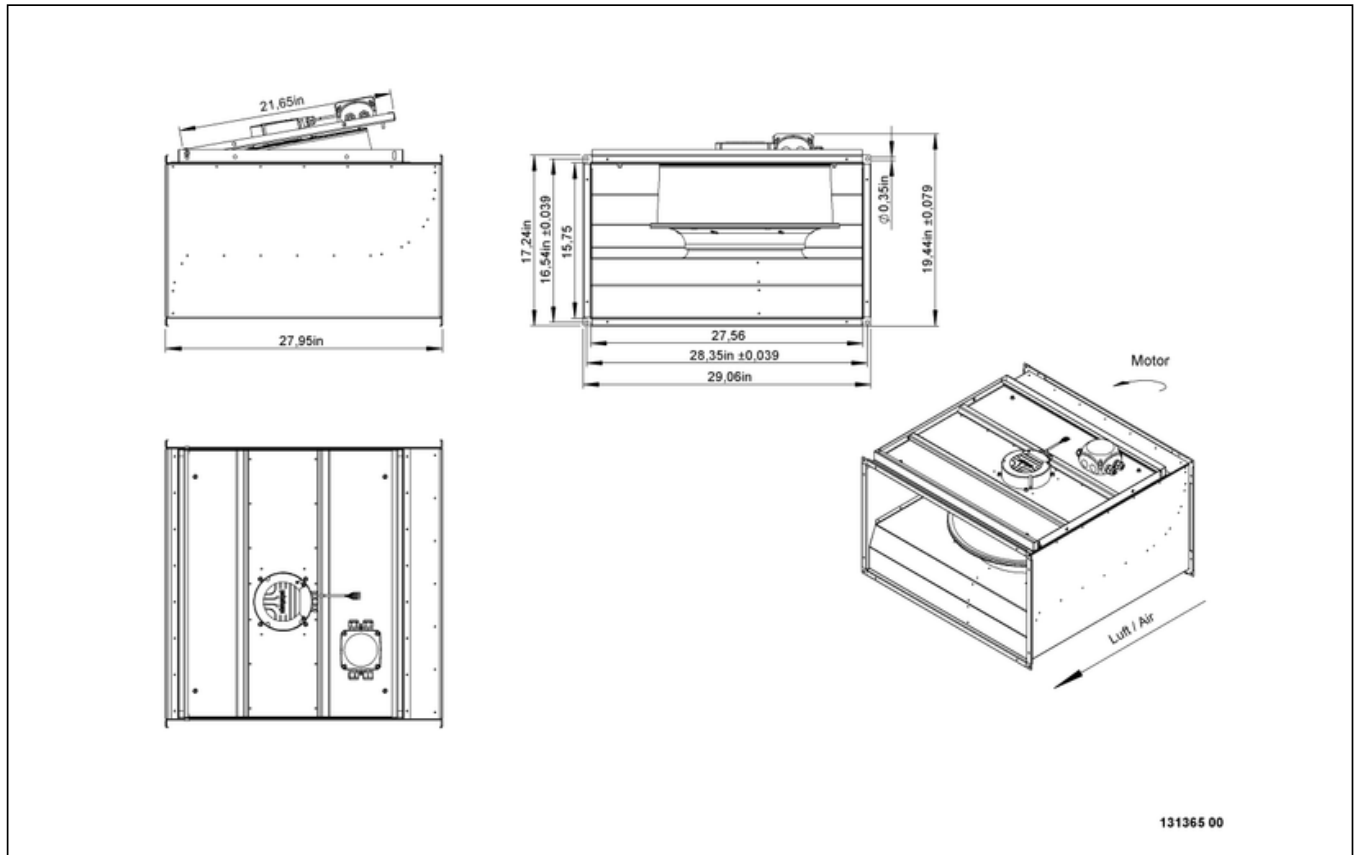

KVR 7040 EC 30


131365

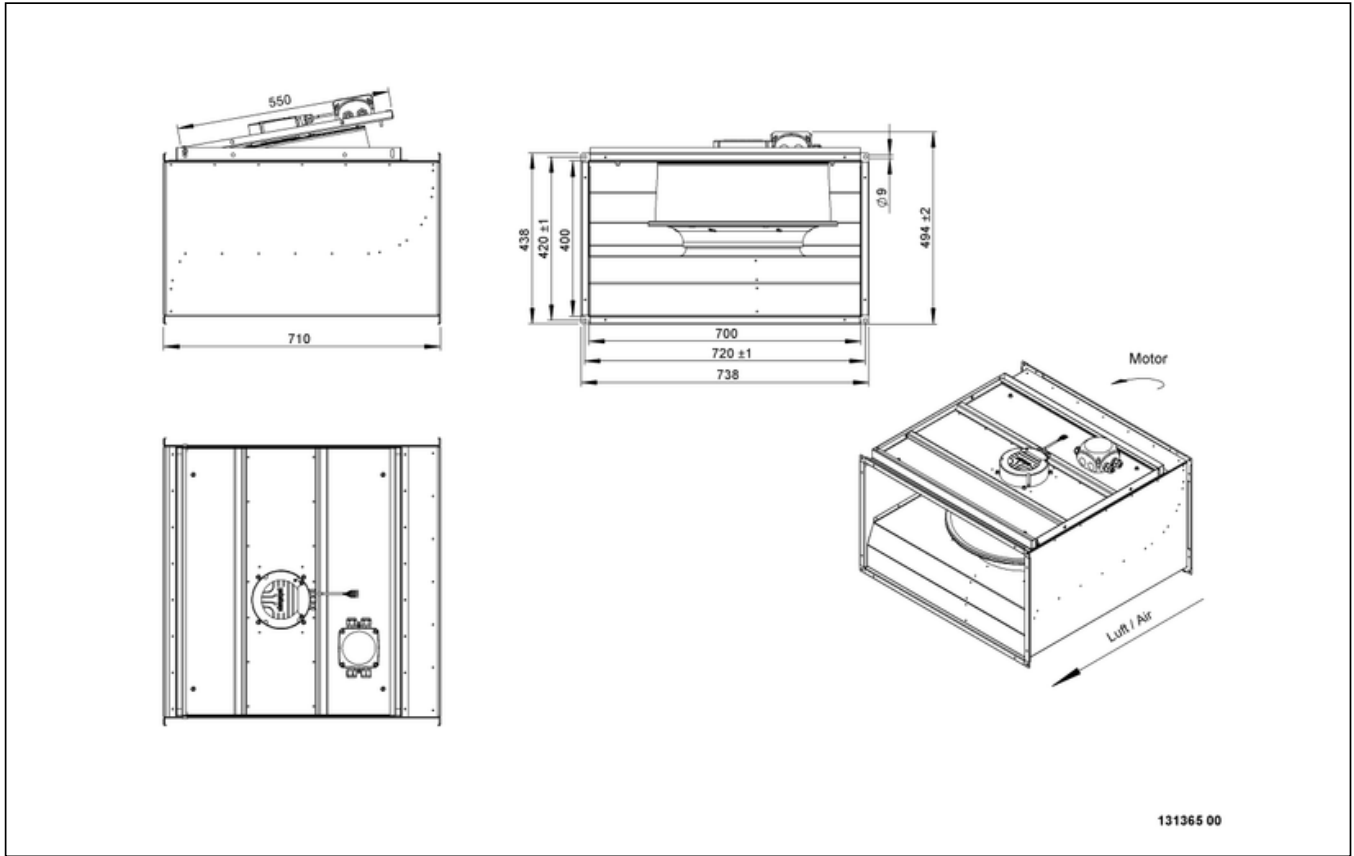

to the product detail page

KVR 7040 EC 30


131365

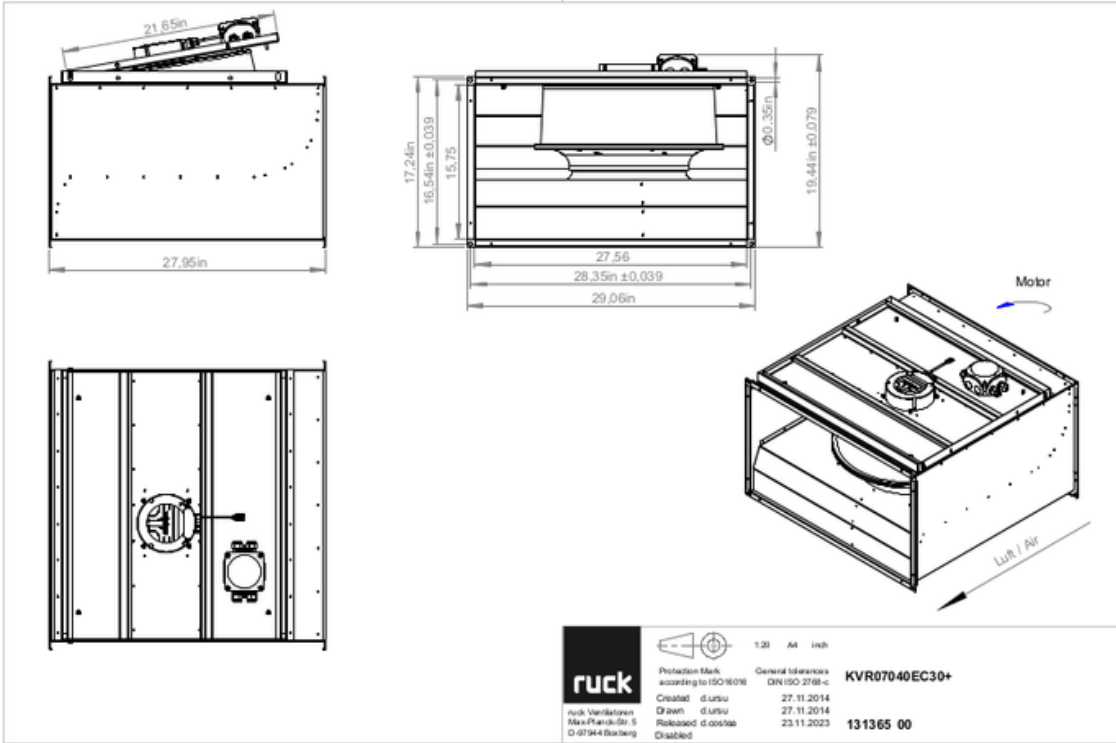

to the product detail page

KVR 7040 EC 30

131365

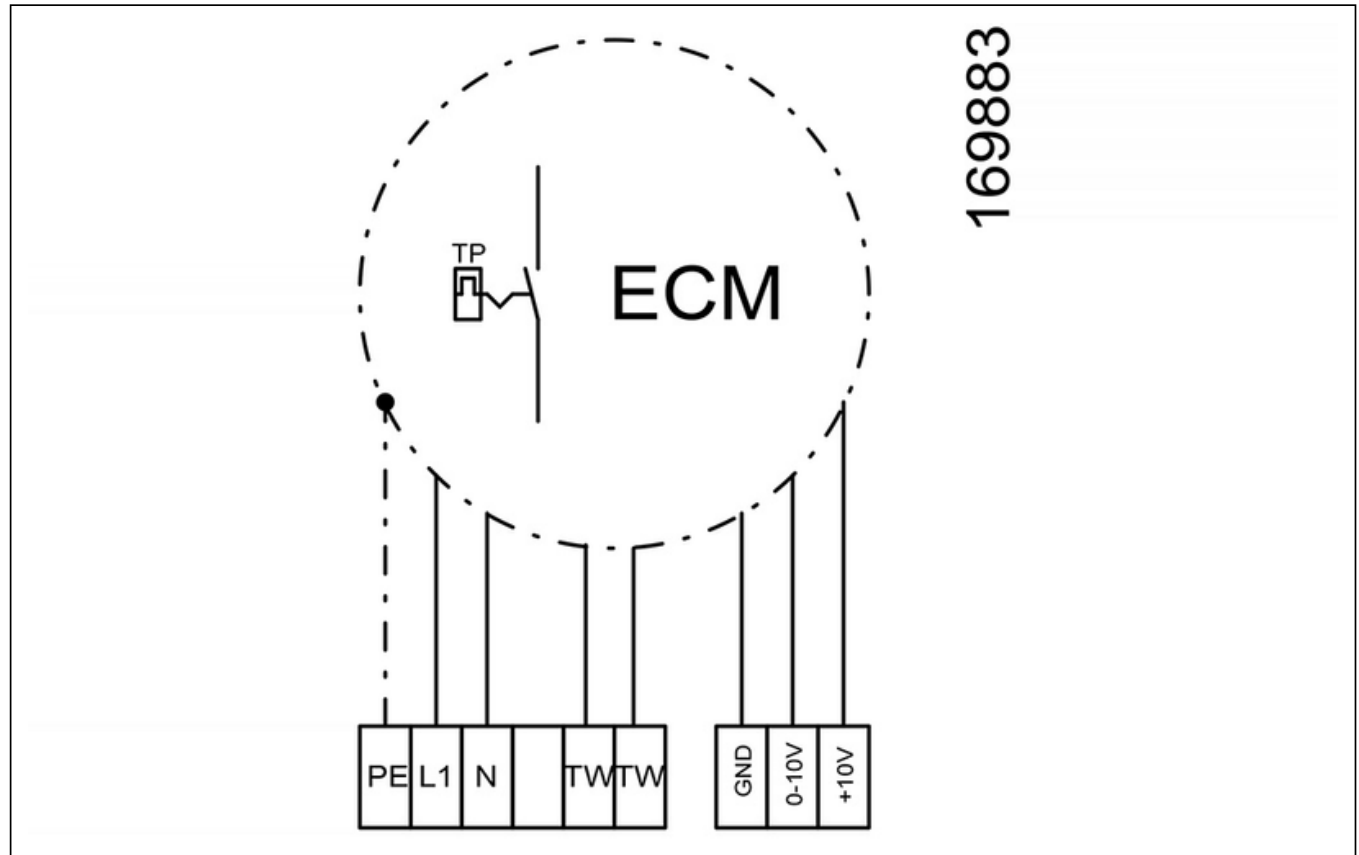

MECHANICAL ACCESSORIES

VKK 7040 | 103944



- Automatic shutter
- Plastic, weather resistant
- Temperature resistant up to 70 °C

VS 7040 | 103951



- Duct connector, flexible
- Standard profile flange P20
- Galvanized steel sheet, plastic band (PVC)
- Temperature resistant up to 70 °C



to the product detail page

KVR 7040 EC 30

131365

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400\text{ V}$, $I_{max} = 25\text{ A}$
- Switching capacity $400\text{ V } 3\text{-} = 5,5\text{ kW}$
- Protection class IP 55

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage +10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

MTP 50 | 153133



- Potentiometer with multifunction output
- 230 VAC $\pm 10\%$ / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable



to the product detail page