

VX100 & VX120


4"/100mm and 5"/120mm axial extract fans

A range of easy to install single speed extract fans. Suitable for a wide range of applications including bathrooms, shower rooms and toilets. VX120 is also suitable for utility rooms. Suitable for wall fitting, both VX100 and VX120 are available in standard and timer variants.

For wall fitting we recommend the VK10 kit (89120AW) which includes wall tube and external grille - VX100 only.

Key Features

- Single speed
- AC motor
- Wall-mounted
- IP rating: IPX4
- 2 year UK manufacturer guarantee

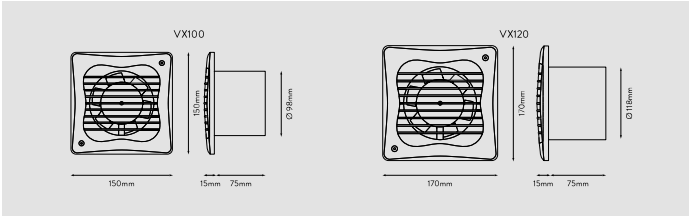

Product Selector		Extract Performance (l/s)	Extract Performance (m³/h)	Electrical Power Rating (W)	Specific Fan Power (SFP) (W/l/s)	Integral Timer	Timer (adjustable from 90s - 30mins)	Sound Pressure Level (dBA@3m)
Model								
VX100	93224AWW	18	66	14.2	0.79			37
VX100T	93225AWW	18	66	14.2	0.79	✓	✓	37
VX120	93228AWW	32	116	23.0	0.71			40
VX120T	93229AWW	32	116	23.0	0.71	✓	✓	40

VX100-SP


4"/100mm axial extract fans with short spigot

A range of single speed extract fans with a short spigot, ideal for shallow wall or ceiling installations. Compact and easy to install, the range is designed for bathrooms, shower rooms and ensembles, and all models include a lubricated-for-life motor with cut-out protection. Available in standard, timer and pull cord variants.

For wall fitting we recommend the VK10 kit (89120AW) which includes wall tube and external grille.

Key Features

- Single speed
- AC motor
- Ceiling or wall mounted
- IP rating - IPX4
- 2 year UK manufacturer guarantee

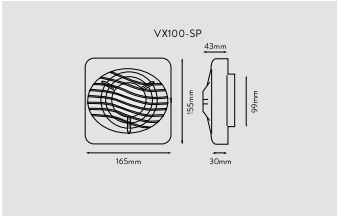

Product Selector		Extract Performance (l/s)	Extract Performance (m³/h)	Electrical Power Rating (W)	Specific Fan Power (SFP) (W/l/s)	Integral Timer	Timer (adjustable from 90s - 30mins)	Sound Pressure Level (dBA@3m)
Model								
VX100-SP	92935AW	21	76	12.0	0.57			41
VX100T-SP	92931AW	21	76	12.0	0.57	✓	✓	41
VX100P-SP	92936AW	21	76	12.0	0.57			41